



	page
<b>TRACTOR RADIAL</b>	
<b>R1W 80/85/90</b>   Standard Tyres 80/85/90 Series   Pattern R1W	06 – 14
<b>R1 Genesis 85/95</b>   Genesis Tyres 85/95 Series   Pattern R1	06 – 14
<b>R1W 70+75</b>   Standard Tyres 70+75 Series   Pattern R1W	15 – 22
<b>R1 Genesis 70</b>   Genesis Tyres 70 Series   Pattern R1	15 – 22
<b>R1W 65</b>   Standard Tyres 65 Series   Pattern R1W	23 – 26
<b>R1/R1W Harvester</b>   Harvester   Pattern R1/R1W	27 – 31
<b>R1 Defender</b>   Defender (Row Crop)   Pattern R1	32 – 37
<b>INDUSTRIAL TRACTOR RADIAL</b>	page
<b>R4</b>   Agro-Industrial Tyres   Pattern R4	38 – 42
<b>FLOTATION RADIAL</b>	page
<b>Agro Grip</b>   Implement Low Pressure Tyres   Pattern Agro Grip	43 – 49
<b>Ride King</b>	50 – 52
<b>F1 Traction</b>   Implement Low Pressure Tyres   Pattern F1 Traction	53 – 56

<b>FLOTATION DIAGONAL</b>	page
<b>FL</b>   Implement Low Pressure Tyres   Pattern FL	57 – 59
<b>FL1</b>   Implement Low Pressure Tyres (light construct.)   Pattern FL1	57 – 59
<b>FT-A</b>   Implement Low Pressure Tyres   Pattern FT-A	57 – 59
<b>IMPLEMENT RADIAL</b>	page
<b>Grass King</b>   Implement Tyres   Pattern Grass King	60 – 63
<b>R305</b>   Implement Tyres   Pattern R305	64 – 66
<b>R100</b>   Implement Tyres   Pattern R100	67 – 69
<b>IMPLEMENT DIAGONAL</b>	page
<b>F302 - F304</b>   Implement Tyres   Pattern F302-F304	70 – 72
	page
<b>CONVERSION TABLE</b>	74 – 77
<b>GENERAL TECHNICAL INFORMATION</b>	78

## TRACTOR RADIAL

### R1W 80/85/90

Standard Tyres 80/85/90 Series

### R1 Genesis 85/95

Genesis Tyres 85/95 Series



WWW.TIANLI-TYRE.COM



#### TRACTOR RADIAL

**R1W 80/85/90** | Standard Tyres 80/85/95 Series | Pattern R1W  
**R1 Genesis 85/95** | Genesis Tyres 85 Series | Pattern R1



#### TRACTOR RADIAL

**R1W 80/85/90** | Standard Tyres 80/85/95 Series | Pattern R1W

- guaranteed true running and driving comfort up to 50 km/h
- wide contact area for up to 4000 working hours
- more and wider lugs in ground and extended wear compound for durability
- excellent driving on and off-the-road
- good self-cleaning abilities due to special angle lugs
- round shoulders for superior ground protection

#### TRACTOR RADIAL

**R1 Genesis 85/95** | Genesis Tyres 85 Series | Pattern R1

- modern agricultural radial tyre
- the shape and angle of the lugs provide good traction and low slippage with excellent power transmission to the ground
- wide footprint area for improved stability and minimum ground pressure
- superior self-cleaning features that allow for a quick change from field operations to road usage
- low wear compound for longer tyre life

WWW.TIANLI-TYRE.COM





## TRACTOR RADIAL

**R1W 80/85/90** | Standard Tyres 80/85/95 Series | Pattern R1W  
**R1 Genesis 85/95** | Genesis Tyres 85 Series | Pattern R1

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth		
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h			
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg		kg	kg
<b>R16</b>	210/95R16 (7.50R16) GENESIS	TL	<b>106A8/106B</b>	7.00	795	215	368	2373		160	1700	1110	815	790	740	740	32	
										200	1945	1270	930	905	845	845		
										240	2185	1425	1045	1020	<b>950</b>	<b>950</b>		
<b>R18</b>	210/95R18 (7.50R18) GENESIS	TL	<b>108A8/108B</b>	7.00	849	215	393	2542		160	1790	1170	860	835	780	780	32	
										200	2050	1335	980	950	890	890		
										240	2300	1500	1100	1070	<b>1000</b>	<b>1000</b>		
<b>R20</b>	210/95R20 (7.50R20) GENESIS	TL	<b>110A8/110B</b>	7.00	895	215	413	2686		160	1900	1240	910	885	830	830	32	
										200	2170	1415	1040	1010	940	940		
										240	2440	1590	1165	1130	<b>1060</b>	<b>1060</b>		
	280/85R20 (11.2R20)	TL	<b>112A8/112B</b>	10.00	986	282	446	2943		60	1440	940	695	670	630	630	42	
										80	1700	1110	820	790	740	740		
										100	1930	1260	930	900	840	840		
120										2160	1410	1040	1010	940	940			
140										2370	1545	1140	1100	1030	1030			
160										2575	1680	1240	1200	<b>1120</b>	<b>1120</b>			
<b>R24</b>	280/85R24 (11.2R24)	TL	<b>115A8/115B</b>	10.00	1080	285	494	3239		60	1565	1020	755	730	680	680	42	
										80	1840	1200	890	860	800	800		
										100	2095	1370	1010	975	910	910		
			120							2350	1530	1130	1090	1020	1020			
			140							2570	1680	1240	1195	1120	1120			
			160							2795	1820	1350	1300	<b>1215</b>	<b>1215</b>			
			200							2880	1880	1390	1340	1250	1250			
			240							3230	2110	1560	1500	1405	1405			
			280							3540	2310	1710	1650	1540	1540			
	320/85R24 (12.4R24)	TL	<b>122A8/122B</b>	11.00	1139	322	520	3400		60	1930	1260	930	900	840	840	43	
										80	2280	1485	1100	1060	990	990		
										100	2590	1690	1250	1200	1125	1125		
										120	2900	1890	1400	1350	1260	1260		
										140	3170	2070	1530	1480	1380	1380		
										160	3450	2250	1665	1605	<b>1500</b>	<b>1500</b>		
										60	2125	1385	1025	990	920	920		45
										80	2505	1630	1210	1165	1090	1090		
										100	2845	1855	1370	1320	1240	1240		
120	3190	2080	1540	1480	1385	1385												
140	3490	2280	1685	1620	1520	1520												
160	3795	2475	1830	1765	<b>1650</b>	<b>1650</b>												
200	3890	2540	1880	1810	1690	1690												
240	4370	2850	2110	2030	<b>1900</b>	<b>1900</b>												
280	4740	3090	2290	2205	2060	2060												
320	5150	3360	2485	2400	<b>2240</b>	<b>2240</b>												

WWW.TIANLI-TYRE.COM



## TRACTOR RADIAL

**R1W 80/85/90** | Standard Tyres 80/85/95 Series | Pattern R1W  
**R1 Genesis 85/95** | Genesis Tyres 85 Series | Pattern R1

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth	
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h		
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg		kg
<b>R24</b>	380/85R24 (14.9R24)	TL	<b>131A8/131B</b>	12.00	1273	382	566	3794		60	2510	1640	1210	1170	1090	1090	47
										80	2960	1930	1430	1380	1290	1290	
										100	3360	2190	1620	1565	1460	1460	
										120	3770	2460	1820	1750	1640	1640	
										140	4125	2690	1990	1920	1790	1790	
										160	4485	2925	2165	2090	<b>1950</b>	<b>1950</b>	
420/85R24 (16.9R24)	TL	<b>137A8/137B</b>	15.00	1322	439	593	3935		60	2960	1930	1430	1380	1290	1290	48	
									80	3490	2280	1685	1620	1520	1520		
									100	3970	2590	1915	1845	1725	1725		
		120							4440	2900	2145	2070	1930	1930			
		140							4870	3170	2350	2260	2115	2115			
		160							5290	3450	2550	2460	<b>2300</b>	<b>2300</b>			
<b>R28</b>	280/85R28 (11.2R28)	TL	<b>118A8/118B</b>	10.00	1182	283	540	3555		60	1700	1110	820	790	740	740	42
										80	2000	1310	970	930	870	870	
										100	2280	1485	1100	1060	990	990	
										120	2550	1660	1230	1185	1110	1110	
										140	2790	1820	1350	1300	1210	1210	
										160	3035	1980	1465	1410	<b>1320</b>	<b>1320</b>	
	320/85R28 (12.4R28)	TL	<b>124A8/124B</b>	11.00	1258	321	575	3776		60	2060	1340	995	960	895	895	43
										80	2430	1580	1170	1130	1055	1055	
										100	2760	1800	1330	1280	1200	1200	
										120	3090	2015	1490	1440	1340	1340	
										140	3385	2210	1630	1575	1470	1470	
										160	3680	2400	1775	1710	<b>1600</b>	<b>1600</b>	
340/85R28 (13.6R28)	TL	<b>127A8/127B</b>	12.00	1308	353	598	3921		60	2250	1470	1090	1050	980	980	45	
									80	2660	1730	1280	1235	1155	1155		
									100	3020	1970	1460	1400	1310	1310		
									120	3380	2205	1630	1570	1470	1470		
									140	3700	2415	1790	1720	1610	1610		
									160	4025	2625	1940	1870	<b>1750</b>	<b>1750</b>		
380/85R28 (14.9R28)	TL	<b>133A8/133B</b>	13.00	1378	386	627	4124		60	2650	1730	1280	1230	1150	1150	47	
									80	3130	2040	1510	1455	1360	1360		
									100	3550	2320	1715	1650	1545	1545		
									120	3980	2595	1920	1850	1730	1730		
									140	4360	2840	2100	2030	1895	1895		
									160	4740	3090	2290	2200	<b>2060</b>	<b>2060</b>		

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL



### TRACTOR RADIAL

**R1W 80/85/90** | Standard Tyres 80/85/95 Series | Pattern R1W  
**R1 Genesis 85/95** | Genesis Tyres 85 Series | Pattern R1

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	
<b>R28</b>	420/85R28 (16.9R28)	TL	<b>139A8/139B</b>	15.00	1438	439	637	4298	60	3130	2040	1510	1455	1360	1360	48
									80	3690	2405	1780	1715	1600	1600	
									100	4190	2730	2020	1950	1820	1820	
									120	4695	3060	2265	2180	2040	2040	
									140	5140	3350	2490	2390	2235	2235	
									160	5590	3645	2700	2600	<b>2430</b>	<b>2430</b>	
									200	5730	3740	2765	2665	2490	2490	
<b>R30</b>	380/85R30 (14.9R30)	TL	<b>135A8/135B</b>	13.00	1407	388	639	4218	60	2810	1830	1355	1305	1220	1220	46
									80	3310	2160	1600	1540	1440	1440	
									100	3760	2450	1815	1750	1635	1635	
									120	4210	2750	2030	1960	1830	1830	
									140	4610	3010	2225	2145	2005	2005	
									160	5010	3270	2420	2330	<b>2180</b>	<b>2180</b>	
									200	5220	3400	2500	2400	2260	2260	
	420/85R30 (16.9R30)	TL	<b>140A8/140B</b>	15.00	1483	439	674	4440	60	3220	2100	1550	1500	1400	1400	48
									80	3795	2475	1830	1765	1650	1650	
									100	4310	2810	2080	2005	1875	1875	
									120	4830	3150	2330	2250	2100	2100	
									140	5290	3450	2550	2460	2300	2300	
									160	5750	3750	2775	2675	<b>2500</b>	<b>2500</b>	
									200	5960	3880	2855	2740	2580	2580	
420/90R30 (16.9R30)	TL	<b>142A8/142B</b>	13.00	1496	434	679	4478	60	3410	2225	1650	1590	1480	1480	48	
								80	4020	2620	1940	1870	1750	1750		
								100	4570	2980	2205	2130	1990	1990		
								120	5120	3340	2470	2380	2225	2225		
								140	5610	3660	2705	2610	2440	2440		
								160	6095	3975	2940	2835	<b>2650</b>	<b>2650</b>		
								200	6295	4105	3040	2930	2740	2740		
460/85R30 (18.4R30)	TL	<b>145A8/145B</b>	16.00	1527	466	680	4566	60	3735	2435	1800	1740	1620	1620	50	
								80	4400	2870	2125	2050	1910	1910		
								100	5000	3260	2410	2330	2175	2175		
								120	5600	3650	2700	2610	2435	2435		
								140	6135	4000	2960	2855	2670	2670		
								160	6670	4350	3220	3100	<b>2900</b>	<b>2900</b>		
								200	6910	4550	3370	3240	<b>3075</b>	<b>3075</b>		
<b>R32</b>	320/85R32 (12.4R32) GENESIS	TL	<b>126A8/126B</b>	10.00	1354	311	623	4063	60	2960	1930	1430	1380	1290	1290	36
									80	3490	2280	1685	1620	1520	1520	
									100	3970	2590	1915	1845	1725	1725	
									120	4440	2900	2145	2070	1930	1930	
									140	4870	3170	2350	2260	2115	2115	
									160	5290	3450	2550	2460	<b>2300</b>	<b>2300</b>	
									200	5610	3660	2705	2610	2440	2440	
									240	6095	3975	2940	2835	<b>2650</b>	<b>2650</b>	
									280	6440	4175	3090	2970	<b>2830</b>	<b>2830</b>	
									320	6790	4375	3240	3110	<b>3015</b>	<b>3015</b>	

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL



### TRACTOR RADIAL

**R1W 80/85/90** | Standard Tyres 80/85/95 Series | Pattern R1W  
**R1 Genesis 85/95** | Genesis Tyres 85 Series | Pattern R1

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	
<b>R34</b>	380/85R34 (14.9R34)	TL	<b>137A8/137B</b>	12.00	1487	389	681	4470	60	2960	1930	1430	1380	1290	1290	46
									80	3490	2280	1685	1620	1520	1520	
									100	3970	2590	1915	1845	1725	1725	
									120	4440	2900	2145	2070	1930	1930	
									140	4870	3170	2350	2260	2115	2115	
									160	5290	3450	2550	2460	<b>2300</b>	<b>2300</b>	
									200	5610	3660	2705	2610	2440	2440	
	420/85R34 (16.9R34)	TL	<b>142A8/142B</b>	15.00	1594	439	710	4784	60	3410	2225	1650	1590	1480	1480	48
									80	4020	2620	1940	1870	1750	1750	
									100	4570	2980	2205	2130	1990	1990	
									120	5120	3340	2470	2380	2225	2225	
									140	5610	3660	2705	2610	2440	2440	
									160	6095	3975	2940	2835	<b>2650</b>	<b>2650</b>	
									200	6295	4105	3040	2930	2740	2740	
<b>R36</b>	460/85R34 (18.4R34)	TL	<b>147A8/147B</b>	16.00	1649	470	743	4944	60	3960	2580	1910	1840	1720	1720	50
									80	4670	3040	2250	2170	2030	2030	
									100	5300	3460	2560	2470	2305	2305	
									120	5940	3875	2870	2760	2580	2580	
									140	6510	4240	3140	3030	2830	2830	
	320/85R36 (12.4R36) GENESIS	TL	<b>128A8/128B</b>	10.00	1448	313	667	4368	160	4140	2700	1980	1925	<b>1800</b>	<b>1800</b>	36
									200	4400	2900	2145	2070	1930	1930	
									240	4670	3040	2250	2170	2030	2030	
									280	4940	3180	2360	2270	2130	2130	
									320	5210	3320	2470	2380	2225	2225	
340/85R36 (13.6R36) GENESIS	TL	<b>132A8/132B</b>	11.00	1489	357	680	4489	160	4600	3000	2200	2140	<b>2000</b>	<b>2000</b>	37	
								200	4860	3200	2300	2240	2100	2100		
<b>R38</b>	340/85R38 (13.6R38) GENESIS	TL	<b>133A8/133B</b>	11.00	1540	353	711	4645	160	4740	3090	2265	2200	<b>2060</b>	<b>2060</b>	37
									200	4980	3240	2370	2310	2170	2170	
									240	5220	3390	2490	2430	2290	2290	
									280	5460	3540	2610	2550	2410	2410	
									320	5700	3690	2730	2670	2530	2530	
	380/80R38	TL	<b>142A8/142B</b>	12.00	1595	377	738	4803	60	2680	1750	1290	1250	1165	1165	46
									80	3170	2070	1530	1470	1380	1380	
									100	3595	2345	1735	1670	1560	1560	
									120	4020	2620	1940	1870	1750	1750	
									140	4390	2860	2120	2040	1910	1910	

WWW.TIANLI-TYRE.COM





TRACTOR RADIAL

R1W 80/85/90 | Standard Tyres 80/85/95 Series | Pattern R1W  
 R1 Genesis 85/95 | Genesis Tyres 85 Series | Pattern R1

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	
					inch	mm				mm	mm±2.5%	mm±2.5%	kpa	kg	kg	
<b>R38</b>	420/85R38 (16.9R38)	TL	<b>144A8/144B</b>	15.00	1667	439	752	5014	60	3605	2350	1740	1680	1570	1570	48
									80	4250	2770	2050	1980	1850	1850	
									100	4830	3150	2330	2250	2100	2100	
									120	5410	3530	2610	2520	2350	2350	
									140	5925	3860	2860	2755	2575	2575	
									160	6440	4200	3110	2995	<b>2800</b>	<b>2800</b>	
	460/85R38 (18.4R38)	TL	<b>149A8/149B</b>	16.00	1737	470	776	5207	60	4185	2730	2020	1950	1820	1820	50
									80	4930	3220	2380	2295	2145	2145	
									100	5605	3655	2705	2610	2440	2440	
									120	6280	4095	3030	2920	2730	2730	
									140	6880	4485	3320	3200	2990	2990	
									160	7475	4875	3610	3480	<b>3250</b>	<b>3250</b>	
	520/85R38 (20.8R38)	TL	<b>155A8/155B</b>	18.00	1863	530	841	5589	60	4990	3255	2410	2320	2170	2170	51
									80	5880	3835	2840	2740	2560	2560	
									100	6680	4360	3225	3110	2905	2905	
									120	7490	4880	3610	3480	3255	3255	
									140	8200	5350	3960	3815	3565	3565	
			160						8910	5810	4300	4145	<b>3875</b>	<b>3875</b>		
200			9340						6090	4510	4340	4060	4060			
240			10405						6785	5020	4840	4520	4520			
280			11470						7480	5540	5340	4990	4990			
320			12405						8090	5990	5770	5390	5390			
360	13340	8700	6440	6205	<b>5800</b>	<b>5800</b>										
650/85R38	TL	<b>173D/176A8</b>	20.00	2072	666	935	6192	60	7185	4685	3470	3340	3120	3120	2840	
								80	8490	5540	4100	3950	3690	3690	3360	
								100	9635	6280	4650	4480	4190	4190	3810	
								120	10780	7030	5200	5010	4685	4685	4260	
								140	11760	7670	5670	5470	5110	5110	4650	
								160	12740	8310	6150	5925	5540	5540	5040	
								200	14530	9480	7010	6760	6320	6320	5750	
								240	16330	10650	7880	7600	7100	<b>7100</b>	<b>6500</b>	

WWW.TIANLI-TYRE.COM



TRACTOR RADIAL

R1W 80/85/90 | Standard Tyres 80/85/95 Series | Pattern R1W  
 R1 Genesis 85/95 | Genesis Tyres 85 Series | Pattern R1

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	
					inch	mm				mm	mm±2.5%	mm±2.5%	kpa	kg	kg	
<b>R42</b>	460/85R42 (18.4R42)	TL	<b>151A8/151B</b>	16.00	1865	473	844	5611	60	4440	2900	2145	2070	1930	1930	50
									80	5240	3415	2530	2435	2280	2280	
									100	5950	3880	2870	2770	2590	2590	
			120						6665	4350	3220	3100	2900	2900		
			140						7300	4760	3520	3395	3170	3170		
			160						7935	5175	3830	3690	<b>3450</b>	<b>3450</b>		
	520/85R42 (20.8R42)	TL	<b>156A8/156B</b>	18.00	1958	530	875	5884	200	8190	5340	3950	3810	3560	3560	
									240	9200	6000	4440	4280	<b>4000</b>	<b>4000</b>	
									60	5310	3465	2560	2470	2310	2310	51
									80	6260	4080	3020	2910	2720	2720	
									100	7115	4640	3430	3310	3090	3090	
									120	7970	5200	3845	3710	3465	3465	
			140						8730	5690	4210	4060	3795	3795		
			160						9490	6190	4580	4410	<b>4125</b>	<b>4125</b>		
			200						9720	6340	4690	4520	4230	4230		
			240						10925	7125	5270	5080	<b>4750</b>	<b>4750</b>		
			280						10190	6640	4915	4740	4430	4430		
			320						11015	7180	5315	5125	4790	4790		
360	11845	7725	5720	5510	<b>5150</b>	<b>5150</b>										
<b>R46</b>	380/90R46	TL	<b>149A8/149B</b>	12.00	1868	391	868	5633	60	3290	2145	1590	1530	1430	1430	47
									80	3890	2535	1875	1810	1690	1690	
									100	4410	2875	2130	2050	1920	1920	
									120	4930	3220	2380	2295	2145	2145	
									140	5380	3510	2600	2500	2340	2340	
									160	5830	3800	2810	2710	2535	2535	
	200	6650	4340	3210	3095	2890	2890									
	240	7475	4875	3610	3480	<b>3250</b>	<b>3250</b>									
	280	8200	5350	3960	3815	3565	3565									
	320	8910	5810	4300	4145	<b>3875</b>	<b>3875</b>									
	360	9490	6190	4580	4410	<b>4125</b>	<b>4125</b>									
	400	10060	6560	4855	4680	<b>4375</b>	<b>4375</b>									
	420/80R46	TL	<b>151A8/151B</b>	13.00	1848	398	849	5577	60	3490	2280	1685	1620	1520	1520	40
									80	4125	2690	1990	1920	1790	1790	
									100	4680	3050	2260	2180	2035	2035	
									120	5240	3415	2530	2435	2280	2280	
									140	5710	3725	2760	2660	2480	2480	
									160	6190	4040	2990	2880	2690	2690	
200									7060	4605	3410	3285	3070	3070		
240									7935	5175	3830	3690	<b>3450</b>	<b>3450</b>		

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL



**TRACTOR RADIAL**

**R1W 80/85/90** | Standard Tyres 80/85/95 Series | Pattern R1W  
**R1 Genesis 85/95** | Genesis Tyres 85 Series | Pattern R1

R46	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	
					inch	mm				mm	mm±2.5%	mm±2.5%	kpa	kg	kg	
480/80R46 (18.4R46)	TL	158A8/158B	16.00	1971	490	905	5936	60	4300	2805	2075	2000	1870	1870	49	
								80	5080	3315	2450	2365	2210	2210		
								100	5770	3760	2780	2680	2510	2510		
								120	6450	4210	3110	3000	2805	2805		
								140	7040	4590	3400	3270	3060	3060		
								160	7625	4970	3680	3550	3315	3315		
								200	8700	5670	4200	4050	3780	3780		
								240	9775	6375	4720	4550	4250	4250		
								60	5470	3570	2640	2550	2380	2380		51
								80	6450	4210	3110	3000	2805	2805		
								100	7330	4780	3540	3410	3190	3190		
								120	8210	5355	3960	3820	3570	3570		
								140	8990	5865	4340	4180	3910	3910		
								160	9775	6375	4720	4550	4250	4250		
200	10170	6630	4910	4730	4420	4420										
240	11400	7440	5500	5305	4960	4960										
280	12480	8140	6020	5810	5430	5430										
320	13410	8740	6470	6240	5830	5830										
360	14485	9450	6990	6740	6300	6300										
400	15410	10050	7440	7170	6700	6700										

WWW.TIANLI-TYRE.COM



**TIANLI**

**TYRES YOU CAN RELY ON.**

TRACTOR RADIAL

**TRACTOR RADIAL**

**R1W 70+75**

Standard Tyres 70+75 Series

**R1 Genesis 70**

Genesis Tyres 70 Series



INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL

WWW.TIANLI-TYRE.COM





### TRACTOR RADIAL

**R1W 70+75** | Standard Tyres 70+75 Series | Pattern R1W  
**R1 Genesis 70** | Genesis Tyres 70 Series | Pattern R1



### TRACTOR RADIAL

**R1W 70+75** | Standard Tyres 70+75 Series | Pattern R1W

- guaranteed true running and driving comfort up to 50 km/h
- wide contact area for up to 4000 working hours
- more and wider lugs in ground and extended wear compound for durability
- excellent driving on and off-the-road
- good self-cleaning abilities due to special angle lugs
- round shoulders for superior ground protection

### TRACTOR RADIAL

**R1 Genesis 70** | Genesis Tyres 70 Series | Pattern R1

- modern agricultural radial tyre
- the shape and angle of the lugs provide good traction and low slippage with excellent power transmission to the ground
- wide footprint area for improved stability and minimum ground pressure
- superior self-cleaning features that allow for a quick change from field operations to road usage
- low wear compound for longer tyre life

WWW.TIANLI-TYRE.COM



### TRACTOR RADIAL

**R1W 70+75** | Standard Tyres 70+75 Series | Pattern R1W  
**R1 Genesis 70** | Genesis Tyres 70 Series | Pattern R1

	tyre size	version	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	Inflation pressure	load capacity						tread depth	
						outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h		
						inch	mm				kg	kg	kg	kg	kg	kg		
<b>R16</b>	260/70R16	Genesis	TL	<b>109A8/109B</b>	8.00	767	250	345	2293	240	2370	1545	1130	1100	<b>1030</b>	<b>1030</b>	31	
											160	2070	1350	990	960	<b>850</b>		<b>850</b>
	280/70R16	Genesis	TL	<b>102A8/102B</b> <b>112A8/112B</b>	9.00	787	273	357	2350	240	2415	1575	1155	1120	1050	1050	32	
200											2710	1770	1300	1260	<b>1120</b>	<b>1120</b>		
160											2070	1350	990	960	<b>900</b>	<b>900</b>		
<b>R18</b>	280/70R18	Genesis	TL	<b>104A8/104B</b> <b>114A8/114B</b>	9.00	849	273	385	2542	240	2415	1575	1155	1120	1050	1050	32	
											200	2710	1770	1300	1260	<b>1180</b>		<b>1180</b>
											160	2070	1350	990	960	<b>900</b>		<b>900</b>
<b>R20</b>	280/70R20	Genesis	TL	<b>116A8/116B</b>	9.00	899	273	412	2698	240	2875	1875	1375	1340	<b>1250</b>	<b>1250</b>	32	
											160	2440	1590	1165	1130	<b>1060</b>		<b>1060</b>
											200	2865	1870	1370	1330	1245		1245
	300/70R20	Genesis	TL	<b>110A8/110B</b> <b>120A8/120B</b> <b>113A8/113B</b> <b>123A8/123B</b>	9.00	948	290	427	2840	240	3220	2100	1540	1500	<b>1400</b>	<b>1400</b>	33	
											160	2645	1725	1265	1230	<b>1150</b>		<b>1150</b>
											200	3170	2070	1520	1475	1380		1380
320/70R20	Genesis	TL	<b>130A8/130B</b>	10.00	985	316	450	2947	240	3565	2325	1705	1660	<b>1550</b>	<b>1550</b>	34		
										280	4020	2620	1920	1870	1750		1750	
										320	4370	2850	2090	2030	<b>1900</b>		<b>1900</b>	
										60	1930	1260	930	900	840		840	
										80	2280	1485	1100	1060	990		990	
										100	2590	1690	1250	1200	1125		1125	
<b>R24</b>	360/70R24		TL	<b>122A8/122B</b> <b>127A8/127B</b>	11.00	1135	354	518	3398	240	2900	1890	1400	1350	1260	1260	42	
											140	3170	2070	1530	1480	1380		1380
											160	3450	2250	1665	1605	<b>1500</b>		<b>1500</b>
											200	3580	2335	1730	1670	1560		1560
											240	4025	2625	1940	1870	<b>1750</b>		<b>1750</b>
											60	2125	1385	1025	990	920		920
	380/70R24		TL	<b>125A8/125B</b> <b>130A8/130B</b>	12.00	1198	384	533	3574	240	2505	1630	1210	1165	1090	1090	42	
											100	2845	1855	1370	1320	1240		1240
											120	3190	2080	1540	1480	1385		1385
											140	3490	2280	1685	1620	1520		1520
											160	3795	2475	1830	1765	<b>1650</b>		<b>1650</b>
											200	3890	2540	1880	1810	1690		1690
420/70R24		TL	<b>130A8/130B</b> <b>136A8/136B</b>	13.00	1231	426	563	3675	240	4370	2850	2110	2030	<b>1900</b>	<b>1900</b>	45		
										60	2450	1595	1180	1140	1060		1060	
										80	2880	1880	1390	1340	1250		1250	
										100	3280	2140	1580	1525	1425		1425	
										120	3670	2390	1770	1710	1595		1595	
										140	4020	2620	1940	1870	1750		1750	
160	4370	2850	2110	2030	<b>1900</b>	<b>1900</b>												
200	4585	2990	2210	2130	1990	1990												
240	5150	3360	2485	2400	<b>2240</b>	<b>2240</b>												

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL



### TRACTOR RADIAL

**R1W 70+75** | Standard Tyres 70+75 Series | Pattern R1W  
**R1 Genesis 70** | Genesis Tyres 70 Series | Pattern R1

	tyre size	version	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth
						outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	
						inch	mm										
<b>R24</b>	480/70R24		TL	<b>138AB/138B</b>	15.00	1314	488	580	3913	60	3040	1980	1470	1410	1320	1320	47
										80	3580	2335	1730	1670	1560	1560	
										100	4070	2655	1965	1890	1770	1770	
										120	4560	2970	2200	2120	1980	1980	
										140	4990	3260	2410	2320	2170	2170	
										160	5430	3540	2620	2525	<b>2360</b>	<b>2360</b>	
										200	5580	3640	2690	2595	2425	2425	
<b>R28</b>	360/70R28		TL	<b>125AB/125B</b>	11.00	1258	356	566	3777	60	2125	1385	1025	990	920	920	42
										80	2505	1630	1210	1165	1090	1090	
										100	2845	1855	1370	1320	1240	1240	
										120	3190	2080	1540	1480	1385	1385	
										140	3490	2280	1685	1620	1520	1520	
										160	3795	2475	1830	1765	<b>1650</b>	<b>1650</b>	
										200	3890	2540	1880	1810	1690	1690	
	380/70R28		TL	<b>127AB/127B</b>	12.00	1304	382	589	3903	60	2250	1470	1090	1050	980	980	42
										80	2660	1730	1280	1235	1155	1155	
										100	3020	1970	1460	1400	1310	1310	
										120	3380	2205	1630	1570	1470	1470	
										140	3700	2415	1790	1720	1610	1610	
										160	4025	2625	1940	1870	<b>1750</b>	<b>1750</b>	
										200	4220	2750	2035	1960	1830	1830	
	420/70R28		TL	<b>133AB/133B</b>	13.00	1350	414	597	4044	60	2650	1730	1280	1230	1150	1150	45
										80	3130	2040	1510	1455	1360	1360	
										100	3550	2320	1715	1650	1545	1545	
										120	3980	2595	1920	1850	1730	1730	
										140	4360	2840	2100	2030	1895	1895	
										160	4740	3090	2290	2200	<b>2060</b>	<b>2060</b>	
										200	4970	3240	2400	2310	2160	2160	
<b>R28</b>	480/70R28		TL	<b>140AB/140B</b>	15.00	1431	477	643	4279	60	3220	2100	1550	1500	1400	1400	47
										80	3795	2475	1830	1765	1650	1650	
										100	4310	2810	2080	2005	1875	1875	
										120	4830	3150	2330	2250	2100	2100	
										140	5290	3450	2550	2460	2300	2300	
										160	5750	3750	2775	2675	<b>2500</b>	<b>2500</b>	
										200	5935	3870	2865	2760	2580	2580	
										240	6670	4350	3220	3100	<b>2900</b>	<b>2900</b>	
										280	7300	4760	3520	3395	3170	3170	
										320	7935	5175	3830	3690	<b>3450</b>	<b>3450</b>	

WWW.TIANLI-TYRE.COM



### TRACTOR RADIAL

**R1W 70+75** | Standard Tyres 70+75 Series | Pattern R1W  
**R1 Genesis 70** | Genesis Tyres 70 Series | Pattern R1

	tyre size	version	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth
						outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	
						inch	mm										
<b>R30</b>	420/70R30		TL	<b>134AB/134B</b>	13.00	1384	422	615	4153	60	2730	1780	1320	1270	1190	1190	45
										80	3220	2100	1550	1500	1400	1400	
										100	3660	2385	1765	1700	1590	1590	
										120	4095	2670	1980	1905	1780	1780	
										140	4485	2925	2165	2090	1950	1950	
										160	4875	3180	2350	2270	<b>2120</b>	<b>2120</b>	
										200	5290	3450	2550	2460	2300	2300	
<b>R30</b>	480/70R30		TL	<b>141AB/141B</b>	15.00	1463	480	653	4382	60	3320	2160	1600	1540	1440	1440	47
										80	3910	2550	1885	1820	1700	1700	
										100	4440	2900	2140	2065	1930	1930	
										120	4975	3245	2400	2310	2160	2160	
										140	5450	3550	2630	2535	2370	2370	
										160	5920	3860	2860	2755	<b>2575</b>	<b>2575</b>	
										200	6295	4105	3040	2930	2740	2740	
										240	7070	4610	3410	3290	<b>3075</b>	<b>3075</b>	
										280	7510	4900	3625	3495	3265	3265	
										320	8165	5325	3940	3800	<b>3550</b>	<b>3550</b>	
										<b>R30</b>	520/70R30		TL	<b>145AB/145B</b>	16.00	1528	
80	4400	2870	2125	2050	1910	1910											
100	5000	3260	2410	2330	2175	2175											
120	5600	3650	2700	2610	2435	2435											
140	6135	4000	2960	2855	2670	2670											
160	6670	4350	3220	3100	<b>2900</b>	<b>2900</b>											
200	7060	4605	3410	3285	3070	3070											
<b>R30</b>	600/70R30		TL	<b>152AB/152B</b>	20.00	1610	586	716	4804	60	4570	2980	2210	2130	1990	1990	51
										80	5390	3515	2600	2510	2340	2340	
										100	6120	3990	2955	2850	2660	2660	
										120	6860	4470	3310	3190	2980	2980	
										140	7510	4900	3625	3495	3265	3265	
										160	8165	5325	3940	3800	<b>3550</b>	<b>3550</b>	
										200	8700	5670	4200	4050	3780	3780	
<b>R34</b>	480/70R34		TL	<b>143AB/143B</b>	15.00	1571	487	720	4717	60	3510	2290	1690	1630	1525	1525	47
										80	4140	2700	1995	1920	1800	1800	
										100	4700	3065	2270	2190	2040	2040	
										120	5265	3430	2540	2450	2290	2290	
										140	5765	3760	2780	2680	2510	2510	
										160	6270	4090	3025	2915	<b>2725</b>	<b>2725</b>	
										200	6650	4340	3210	3095	2890	2890	
				<b>149AB/149B</b>						240	7475	4875	3610	3480	<b>3250</b>	<b>3250</b>	

WWW.TIANLI-TYRE.COM





**TRACTOR RADIAL**

**R1W 70+75** | Standard Tyres 70+75 Series | Pattern R1W  
**R1 Genesis 70** | Genesis Tyres 70 Series | Pattern R1

	tyre size	version	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	Inflation pressure	load capacity							tread depth	
						outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	65 km/h		
						inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg		kg
<b>R34</b>	520/70R34		TL	<b>148A8/148B</b>	16.00	1639	530	739	4916	60	4060	2645	1960	1890	1760	1760			
										80	4780	3120	2310	2225	2080	2080			
										100	5430	3540	2620	2530	2360	2360			
										120	6085	3970	2940	2830	2645	2645			
										140	6665	4350	3220	3100	2900	2900			
	160	7245	4725	3500	3370	<b>3150</b>	<b>3150</b>												
	600/70R34		TL	<b>160D/163A8</b>	20.00	1705	586	784	5107	60	4930	3220	2380	2295	2145	2145	1950		
										80	5830	3800	2810	2710	2535	2535	2310		
										100	6615	4310	3190	3080	2875	2875	2620		
										120	7400	4825	3570	3440	3220	3220	2930		
140										8070	5265	3895	3755	3510	3510	3190			
160										8745	5700	4220	4070	3800	3800	3460			
200										9980	6510	4815	4640	4340	4340	3950			
240	11210	7310	5410	5215	4875	<b>4500</b>													
<b>R38</b>	480/70R38		TL	<b>145A8/145B</b>	15.00	1683	483	763	5062	60	3735	2435	1800	1740	1620	1620			
										80	4400	2870	2125	2050	1910	1910			
										100	5000	3260	2410	2330	2175	2175			
										120	5600	3650	2700	2610	2435	2435			
										140	6135	4000	2960	2855	2670	2670			
	160	6670	4350	3220	3100	<b>2900</b>	<b>2900</b>												
	520/70R38		TL	<b>150A8/150B</b>	16.00	1743	529	787	5238	60	4315	2810	2080	2010	1875	1875			
										80	5085	3320	2450	2365	2210	2210			
										100	5780	3770	2790	2690	2510	2510			
										120	6470	4220	3120	3010	2810	2810			
										140	7090	4620	3420	3300	3080	3080			
	160	7705	5025	3720	3585	<b>3350</b>	<b>3350</b>												
	580/70R38		TL	<b>155A8/155B</b>	18.00	1822	580	811	5465	60	4990	3255	2410	2320	2170	2170			
										80	5880	3835	2840	2740	2560	2560			
										100	6680	4360	3225	3110	2905	2905			
										120	7490	4880	3610	3480	3255	3255			
										140	8200	5350	3960	3815	3565	3565			
										160	8910	5810	4300	4145	<b>3875</b>	<b>3875</b>			
200										11315	7380	5460	5260	4920	4920				
240	12560	8190	6060	5840	5460	5460													
710/70R38		TL	<b>166A8/166B</b>	23.00	1950	741	863	5837	60	6825	4450	3290	3175	2970	2970				
									80	8045	5250	3880	3740	3500	3500				
									100	9140	5960	4410	4250	3975	3975				
									120	10240	6680	4940	4760	4450	4450				
									140	11215	7310	5410	5220	4875	4875				
									160	12190	7950	5880	5670	<b>5300</b>	<b>5300</b>				
									200	12590	8210	6075	5860	5470	5470				
									240	14145	9225	6830	6580	<b>6150</b>	<b>6150</b>				
									280	15450	10070	7455	7185	6715	6715				
									320	16790	10950	8100	7810	<b>7300</b>	<b>7300</b>				



**TRACTOR RADIAL**

**R1W 70+75** | Standard Tyres 70+75 Series | Pattern R1W  
**R1 Genesis 70** | Genesis Tyres 70 Series | Pattern R1

	tyre size	version	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	Inflation pressure	load capacity							tread depth
						outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	65 km/h	
						inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	
<b>R42</b>	620/70R42		TL	<b>160A8/160B</b>	20.00	1917	626	841	5762	60	5795	3780	2800	2695	2520	2520		
										80	6830	4455	3300	3180	2970	2970		
										100	7760	5060	3745	3610	3375	3375		
										120	8690	5670	4195	4045	3780	3780		
										140	9520	6210	4595	4430	4140	4140		
										160	10350	6750	4995	4815	<b>4500</b>	<b>4500</b>		
										200	10850	7075	5235	5050	4720	4720		
										240	12190	7950	5880	5670	<b>5300</b>	<b>5300</b>		
										280	13330	8690	6430	6200	5795	5795		
	320	14490	9450	6990	6740	<b>6300</b>	<b>6300</b>											
	710/70R42		TL	<b>168A8/168B</b>	23.00	2079	743	937	6234	60	7210	4700	3480	3355	3135	3135		
										80	8500	5540	4100	3955	3695	3695		
										100	9660	6300	4660	4490	4200	4200		
										120	10820	7055	5220	5030	4700	4700		
										140	11850	7730	5720	5510	5150	5150		
160										12880	8400	6215	5990	<b>5600</b>	<b>5600</b>			
200	13305	8680	6420	6190	5785	5785												
240	14950	9750	7215	6955	<b>6500</b>	<b>6500</b>												
710/75R42		TL	<b>175D/178A8</b>	23.00	2127	728	961	6356	60	7590	4950	3660	3530	3300	3300	3000		
									80	8970	5850	4330	4170	3900	3900	3550		
									100	10180	6640	4910	4735	4425	4425	4030		
									120	11385	7425	5495	5300	4950	4950	4505		
									140	12420	8100	5990	5780	5400	5400	4910		
									160	13455	8775	6490	6260	5850	5850	5320		
									200	15350	10010	7410	7140	6675	6675	6070		
240	17250	11250	8325	8025	7500	<b>7500</b>	<b>6900</b>											

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL





**TIANLI**

**TYRES YOU  
CAN RELY ON.**

TRACTOR  
RADIAL

**R1W 65**

Standard Tyres 65 Series



WWW.TIANLI-TYRE.COM



**TRACTOR RADIAL**

**R1W 65** | Standard Tyres 65 Series | Pattern R1W



- 65 km/h approval
- excellent mileage and durability
- more lugs in ground for enhanced traction
- high lugs and special anti wear tread compound for extended tyre lifetime
- excellent driving on and off-the-road
- good self-cleaning properties due to specially angled lugs
- round shoulders for superior protection of grassland and turf



WWW.TIANLI-TYRE.COM

TRACTOR  
RADIAL

INDUSTRIAL  
TRACTOR RADIAL

FLOTATION  
RADIAL

FLOTATION  
DIAGONAL

IMPLEMENT  
RADIAL

IMPLEMENT  
DIAGONAL





## TRACTOR RADIAL

R1W 65 | Standard Tyres 65 Series | Pattern R1W

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity							tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	65 km/h	
					inch	mm				mm±2.5%	mm	kg	kg	kg	kg	kg	
<b>R24</b>	44D/65R24	TL	<b>128D/131A8</b>	14.00	1190	437	530	3556	60	2510	1640	1210	1170	1090	1090	990	45
									80	2960	1930	1430	1380	1290	1290	1170	
									100	3360	2190	1620	1565	1460	1460	1330	
									120	3770	2460	1820	1750	1640	1640	1490	
									140	4125	2690	1990	1920	1790	1790	1630	
									160	4485	2925	2165	2090	<b>1950</b>	1950	<b>1800</b>	
	200	4830	3150	2330	2250	2100	2100	1910									
	240	5430	3540	2620	2525	<b>2360</b>	2360	<b>2180</b>									
	48D/65R24	TL	<b>127D/130A8</b>	15.00	1224	469	541	3653	60	2880	1880	1390	1340	1250	1250	1140	46
									80	3410	2220	1645	1585	1480	1480	1350	
									100	3890	2540	1880	1810	1690	1690	1540	
									120	4370	2850	2110	2030	<b>1900</b>	1900	<b>1750</b>	
140									4740	3090	2290	2205	2060	2060	1875		
160									5150	3360	2485	2400	<b>2240</b>	2240	<b>2060</b>		
200	5580	3640	2690	2595	2425	2425	2210										
240	6270	4090	3025	2915	<b>2725</b>	2725	<b>2500</b>										
54D/65R24	TL	<b>140D/143A8</b>	16.00	1316	540	585	3918	60	3510	2290	1690	1630	1525	1525	1390	48	
								80	4140	2700	1995	1920	1800	1800	1640		
								100	4700	3065	2270	2190	2040	2040	1860		
								120	5265	3430	2540	2450	2290	2290	2080		
								140	5765	3760	2780	2680	2510	2510	2280		
								160	6270	4090	3025	2915	<b>2725</b>	2725	<b>2500</b>		
200	6650	4340	3210	3095	2890	2890	2630										
240	7475	4875	3610	3480	<b>3250</b>	3250	<b>3000</b>										
<b>R28</b>	44D/65R28	TL	<b>131D/134A8</b>	14.00	1288	439	579	3862	60	2730	1780	1320	1270	1190	1190	1080	45
									80	3220	2100	1550	1500	1400	1400	1270	
									100	3660	2385	1765	1700	1590	1590	1450	
									120	4095	2670	1980	1905	1780	1780	1620	
									140	4485	2925	2165	2090	1950	1950	1775	
									160	4875	3180	2350	2270	<b>2120</b>	2120	<b>1950</b>	
	200	5270	3440	2540	2450	2290	2290	2085									
	240	5920	3860	2860	2755	<b>2575</b>	2575	<b>2360</b>									
	48D/65R28	TL	<b>136D/139A8</b>	15.00	1336	466	593	4002	60	3130	2040	1510	1455	1360	1360	1240	46
									80	3690	2405	1780	1715	1600	1600	1460	
									100	4190	2730	2020	1950	1820	1820	1660	
									120	4695	3060	2265	2180	2040	2040	1860	
140									5140	3350	2480	2390	2235	2235	2030		
160									5590	3645	2700	2600	<b>2430</b>	2430	<b>2240</b>		
200	5935	3870	2865	2760	2580	2580	2350										
240	6670	4350	3220	3100	<b>2900</b>	2900	<b>2650</b>										

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL



## TRACTOR RADIAL

R1W 65 | Standard Tyres 65 Series | Pattern R1W

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity							tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	65 km/h	
					inch	mm				mm±2.5%	mm	kg	kg	kg	kg	kg	
<b>R28</b>	54D/65R28	TL	<b>142D/145A8</b>	16.00	1424	533	631	4257	60	3735	2435	1800	1740	1620	1620	1480	48
									80	4400	2870	2125	2050	1910	1910	1740	
									100	5000	3260	2410	2330	2175	2175	1980	
									120	5600	3650	2700	2610	2435	2435	2220	
									140	6140	4000	2960	2850	2670	2670	2430	
									160	6670	4350	3220	3100	2900	2900	<b>2650</b>	
	200	7270	4740	3510	3380	3160	3160	2875									
	240	8165	5325	3940	3800	3550	3550	<b>3250</b>									
	60D/65R28	TL	<b>142D/145A8</b>	18.00	1486	593	652	4364	60	4400	2870	2125	2050	1910	1910	1740	49
									80	5200	3390	2510	2420	2260	2260	2060	
									100	5940	3870	2865	2760	2580	2580	2350	
									120	6670	4350	3220	3100	2900	2900	<b>2650</b>	
140									7090	4620	3420	3300	3080	3080	2805		
160									7705	5025	3720	3580	3350	3350	<b>3075</b>		
200	8440	5510	4075	3930	3670	3670	3340										
240	9490	6190	4580	4410	4125	4125	<b>3750</b>										
<b>R30</b>	54D/65R30	TL	<b>143D/146A8</b>	16.00	1477	535	653	4422	60	3860	2520	1860	1800	1680	1680	1530	48
									80	4550	2970	2200	2120	1980	1980	1800	
									100	5175	3375	2500	2410	2250	2250	2050	
									120	5795	3780	2800	2700	2520	2520	2290	
									140	6350	4140	3060	2950	2760	2760	2510	
									160	6900	4500	3320	3210	3000	3000	<b>2725</b>	
200	7470	4870	3605	3475	3250	3250	2955										
240	8395	5475	4050	3905	3650	3650	<b>3350</b>										
<b>R34</b>	54D/65R34	TL	<b>140D/143A8</b>	16.00	1581	539	716	4746	60	4140	2700	1995	1920	1800	1800	1640	48
									80	4890	3190	2360	2270	2125	2125	1930	
									100	5580	3640	2690	2595	2425	2425	2210	
									120	6270	4090	3020	2915	2725	2725	<b>2500</b>	
									140	6665	4350	3220	3100	2900	2900	2640	
									160	7245	4725	3500	3370	3150	3150	<b>2900</b>	
	200	7930	5170	3830	3690	3450	3450	3140									
	240	8910	5810	4300	4150	3875	3875	<b>3550</b>									
	60D/65R34	TL	<b>145D/148A8</b>	18.00	1665	607	750	4992	60	4780	3120	2310	2225	2080	2080	1890	49
									80	5650	3685	2730	2630	2460	2460	2235	
									100	6450	4205	3110	3000	2800	2800	2550	
									120	7245	4725	3500	3370	3150	3150	<b>2900</b>	
140									7935	5175	3830	3690	3450	3450	3140		
160									8625	5625	4160	4010	3750	3750	<b>3450</b>		
200	9210	6010	4445	4285	4005	4005	3645										
240	10350	6750	4995	4815	4500	4500	<b>4125</b>										

WWW.TIANLI-TYRE.COM



## TRACTOR RADIAL

R1W 65 | Standard Tyres 65 Series | Pattern R1W

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity							tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	65 km/h	
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	
<b>R38</b>	540/65R38	TL	<b>147D/150A8</b>	16.00	1682	539	759	5058	60	4315	2810	2080	2010	1875	1875	1710	48
									80	5085	3320	2450	2365	2210	2210	2010	
									100	5780	3770	2790	2690	2510	2510	2285	
									120	6470	4220	3120	3010	2810	2810	2560	
									140	7090	4620	3420	3300	3080	3080	2805	
									160	7705	5025	3720	3585	<b>3350</b>	3350	<b>3075</b>	
	200	8190	5340	3950	3810	3560	3560	3240									
	240	9200	6000	4440	4280	<b>4000</b>	4000	<b>3650</b>									
	600/65R38	TL	<b>147D/150A8</b>	18.00	1768	604	796	5311	60	5085	3320	2450	2365	2210	2210	2010	49
									80	6010	3920	2900	2795	2610	2610	2380	
									100	6860	4470	3310	3190	2980	2980	2710	
									120	7705	5025	3720	3585	<b>3350</b>	3350	<b>3075</b>	
									140	8460	5520	4085	3940	3680	3680	3350	
									160	9200	6000	4440	4280	<b>4000</b>	4000	<b>3650</b>	
	200	9720	6340	4690	4520	4230	4230	3850									
	240	10925	7125	5270	5080	<b>4750</b>	4750	<b>4375</b>									
	650/65R38	TL	<b>157D/160A8</b>	20.00	1812	653	815	5439	60	5795	3780	2800	2700	2520	2520	2290	51
									80	6830	4455	3300	3180	2970	2970	2700	
100									7760	5060	3745	3610	3375	3375	3070		
120									8690	5670	4195	4045	3780	3780	3440		
140									9520	6210	4595	4430	4140	4140	3770		
160									10350	6750	4995	4815	<b>4500</b>	4500	<b>4125</b>		
200	10850	7075	5235	5050	4720	4720	4290										
240	12190	7950	5880	5670	<b>5300</b>	5300	<b>4875</b>										
<b>R42</b>	650/65R42	TL	<b>158D/161A8</b>	20.00	1921	651	865	5775	60	5960	3885	2875	2770	2590	2590	2360	51
									80	7020	4580	3390	3265	3050	3050	2780	
									100	7980	5200	3850	3710	3470	3470	3160	
									120	8935	5830	4310	4160	3885	3885	3535	
									140	9790	6380	4720	4550	4255	4255	3870	
									160	10640	6940	5130	4950	<b>4625</b>	4625	<b>4250</b>	
									200	11460	7475	5530	5330	4980	4980	4535	
									240	12880	8400	6215	5990	<b>5600</b>	5600	<b>5150</b>	
									280	13750	8970	6640	6400	5980	5980	5440	
									320	14950	9750	7215	6955	<b>6500</b>	6500	<b>6000</b>	

WWW.TIANLI-TYRE.COM



# TIANLI

TYRES YOU CAN RELY ON.

TRACTOR RADIAL

TRACTOR RADIAL

# Harvester

Pattern R1/R1W



INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL





## TRACTOR RADIAL

R1/R1W Harvester | Harvester | Pattern R1/R1W



- robust and stable tyre with excellent price-performance ratio
- high tyre volume and load capacities at low inflation pressure
- an aggressive R1-W tread pattern, featuring sharp shoulders for excellent grip
- high traction capabilities and minimum slippage guarantee constant travel speed necessary for proper harvesting operations
- special reinforced belt construction and stubble guard
- extended tyre lifetime due to special tread rubber compound



WWW.TIANLI-TYRE.COM



## TRACTOR RADIAL

R1/R1W Harvester | Harvester | Pattern R1/R1W

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	
					inch	mm										
<b>R25</b>	1000/50R25 <b>Terra King</b>	TL	175A8/175B	36.00	1640	1060	731	4862	60	6350	4140	3060	2950	2760	2760	50
									80	7620	4970	3675	3540	3310	3310	
									100	8570	5590	4135	3990	3725	3725	
									120	9520	6210	4595	4430	4140	4140	
									140	10470	6830	5055	4870	4550	4550	
									160	11425	7450	5510	5315	4970	4970	
									200	13010	8490	6280	6050	5660	5660	
									240	14440	9420	6970	6720	6280	6280	
280	15870	10350	7660	7380	<b>6900</b>	<b>6900</b>										
<b>R26</b>	620/75R26 (23.1R26)	TL	166A8/166B	DW20	1605	641	722	4778	60	4510	2940	2180	2100	1960	1960	45
									80	5360	3500	2590	2495	2330	2330	
									100	6095	3975	2940	2835	2650	2650	
									120	6825	4450	3290	3175	2970	2970	
									140	7435	4850	3590	3460	3230	3230	
									160	8045	5250	3880	3740	3500	3500	
									200	9140	5960	4410	4250	3975	3975	
									240	10240	6680	4940	4760	4450	4450	
									280	11215	7310	5410	5220	4875	4875	
									320	12190	7950	5880	5670	<b>5300</b>	<b>5300</b>	
<b>R26</b>	750/65R26 (28LR26)	TL	158A8/158B	DW25	1600	761	710	4761	60	5470	3570	2640	2550	2380	2380	46
									80	6450	4210	3110	3000	2805	2805	
									100	7330	4780	3540	3410	3190	3190	
									120	8210	5355	3960	3820	3570	3570	
									140	8990	5865	4340	4180	3910	3910	
									160	9775	6375	4720	4550	<b>4250</b>	<b>4250</b>	
									200	10850	7075	5235	5050	4720	4720	
									240	12190	7950	5880	5670	<b>5300</b>	<b>5300</b>	
<b>R32</b>	650/75R32 (24.5R32)	TL	167A8/167B	DW20	1796	658	810	5362	60	5515	3600	2660	2565	2400	2400	48
									80	6520	4250	3145	3030	2830	2830	
									100	7395	4820	3570	3440	3215	3215	
									120	8270	5395	3990	3850	3600	3600	
									140	9025	5885	4355	4200	3920	3920	
									160	9780	6380	4720	4550	4250	4250	
									200	11155	7275	5380	5190	4850	4850	
									240	12535	8175	6050	5830	<b>5450</b>	<b>5450</b>	
									280	13330	8690	6430	6200	5795	5795	
									320	14490	9450	6990	6740	<b>6300</b>	<b>6300</b>	

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL





## TRACTOR RADIAL

R1/R1W Harvester | Harvester | Pattern R1/R1W

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity							tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	65km/h	
					inch	mm				mm	kg	kg	kg	kg	kg	kg	
<b>R32</b>	800/65R32 (30.5LR32)	TL	<b>167A8/167B</b>	DW27	1833	797	820	5460	kpa	60	7020	4580	3390	3265	3050	3050	
										80	8270	5395	3990	3850	3600	3600	
										100	9400	6130	4540	4370	4090	4090	
										120	10530	6870	5080	4900	4580	4580	
										140	11530	7520	5565	5365	5010	5010	
										160	12535	8175	6050	5830	<b>5450</b>	<b>5450</b>	
										200	12895	8410	6220	6000	5610	5610	
										240	14490	9450	6990	6740	<b>6300</b>	<b>6300</b>	
										280	15870	10350	7660	7380	6900	6900	
										320	17250	11250	8325	8025	<b>7500</b>	<b>7500</b>	
										60	7020	4580	3390	3265	3140	3050	3050
										80	8350	5445	4030	3880	3740	3630	3630
100	9490	6190	4580	4410	4250	4125	4125										
120	10625	6930	5130	4940	4760	4620	4620										
140	11575	7550	5585	5385	5180	5030	5030										
160	12520	8170	6040	5825	5610	5445	5445										
200	14230	9280	6870	6620	6370	6190	6190										
240	15940	10395	7690	7415	7140	6930	6930										
280	17460	11385	8425	8120	7820	7590	7590										
320	18975	12375	9160	8830	8500	<b>8250</b>	<b>8250</b>										
<b>NEW</b>	IF900/60R32	TL	<b>185B/185D</b>	31.00	1910	891	855	5688	kpa	60	7870	5130	3800	3660	3525	3420	
										80	9360	6105	4520	4355	4190	4070	4070
										100	10640	6940	5130	4950	4760	4625	4625
										120	11910	7770	5750	5540	5335	5180	5180
										140	12980	8460	6260	6040	5810	5640	5640
										160	14040	9160	6780	6530	6290	6105	6105
										200	15955	10405	7700	7420	7145	6940	6940
										240	17870	11655	8625	8310	8000	7770	7770
										280	19570	12765	9445	9105	8765	8510	8510
										320	21275	13875	10270	9900	9530	<b>9250</b>	<b>9250</b>
										60	9360	6105	4520	4355	4190	4070	4070
										80	11060	7215	5340	5150	4950	4810	4810
100	12550	8185	6060	5840	5620	5460	5460										
120	14040	9160	6780	6530	6290	6105	6105										
140	15320	9990	7390	7125	6860	6660	6660										
160	16595	10820	8010	7720	7430	7215	7215										
200	18935	12350	9140	8810	8480	8230	8230										
240	21275	13875	10270	9900	9530	9250	9250										
280	17460	11385	8425	8120	7820	7590	7590										
320	18975	12375	9160	8830	8500	<b>8250</b>	<b>8250</b>										
<b>NEW</b>	IF1050/50R32 mainly for grassland applications	TL	<b>185B/185D</b>	36.00	1863	1038	833	5686	kpa	60	9360	6105	4520	4355	4190	4070	4070
										80	11060	7215	5340	5150	4950	4810	4810
										100	12550	8185	6060	5840	5620	5460	5460
										120	14040	9160	6780	6530	6290	6105	6105
										140	15320	9990	7390	7125	6860	6660	6660
										160	16595	10820	8010	7720	7430	7215	7215
										200	18935	12350	9140	8810	8480	8230	8230
										240	21275	13875	10270	9900	9530	9250	9250
										280	17460	11385	8425	8120	7820	7590	7590
										320	18975	12375	9160	8830	8500	<b>8250</b>	<b>8250</b>

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL



## TRACTOR RADIAL

R1/R1W Harvester | Harvester | Pattern R1/R1W

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity							tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	65km/h	
					inch	mm				mm	kg	kg	kg	kg	kg	kg	
<b>R38</b>	<b>NEW</b> IF800/70R38	TL	<b>184B/184D</b>	27.00	2085	805	927	6190	kpa	60	9110	5940	4395	4240	4080	3960	3960
										80	10760	7020	5195	5010	4820	4680	4680
										100	12210	7965	5890	5680	5470	5310	5310
										120	13660	8910	6590	6355	6120	5940	5940
										140	14900	9720	7190	6930	6670	6480	6480
										160	16145	10530	7790	7510	7230	7020	7020
										200	18420	12015	8890	8570	8250	8010	8010
										240	20700	13500	9990	9630	9270	<b>9000</b>	<b>9000</b>

TRACTOR 21 280 1436-1 EN 307 2832 10 W8 380 380 348 380

1000/50R25 Terra King

800/65R32



WWW.TIANLI-TYRE.COM





**TIANLI**

**TYRES YOU  
CAN RELY ON.**

TRACTOR  
RADIAL

# R1 Defender

Defender (Row Crop)



[WWW.TIANLI-TYRE.COM](http://WWW.TIANLI-TYRE.COM)



## TRACTOR RADIAL

**R1 Defender** | Defender (Row Crop) | Pattern R1



- row crop tyres with rounded shoulders for every kind of cultivation, harvesting and spraying operation
- minimum damage to crops even in narrow spaced plantations
- strong radial casing for optimum ground pressure distribution and low ground compaction lowers damage to soil and increases crop yield



[WWW.TIANLI-TYRE.COM](http://WWW.TIANLI-TYRE.COM)

TRACTOR  
RADIAL

INDUSTRIAL  
TRACTOR RADIAL

FLOTATION  
RADIAL

FLOTATION  
DIAGONAL

IMPLEMENT  
RADIAL

IMPLEMENT  
DIAGONAL



## TRACTOR RADIAL

R1 Defender | Defender (Row Crop) | Pattern R1

	tyre size	TT/TL	load/speed index	rims (preferred in bold)	unloaded		static loaded radius mm±2.5%	rolling circumference mm±2.5%	inflation pressure kpa	load capacity						tread depth mm	
					outer diameter mm	section width mm				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h		65 km/h
<b>R32</b>	23D/95R32 (9.5R32)	TL	<b>126A8/126B</b>	<b>W7x32</b> W8x32	1240	236	585	3742	160	2420	1580	1160	1130	1050	1050	-	
									200	2740	1785	1310	1270	1190	1190	-	
									240	3050	1990	1460	1420	1325	1325	-	
									280	3360	2190	1610	1560	1460	1460	-	
									320	3635	2370	1740	1690	1580	1580	-	
	360	3910	2550	1870	1820	<b>1700</b>	<b>1700</b>	-									
	400	4140	2700	1980	1925	<b>1800</b>	<b>1800</b>	-									
	27D/95R32 (11.2R32)	TL	<b>134A8/134B</b>	<b>W9x32</b> W8x32 W10x32	1319	284	620	3975	160	3020	1970	1445	1405	1310	1310	-	
									200	3410	2225	1630	1590	1480	1480	-	
									240	3800	2480	1820	1770	1650	1650	-	
280									4190	2735	2005	1950	1820	1820	-		
320									4535	2960	2170	2110	1970	1970	-		
360	4875	3180	2330	2270	<b>2120</b>	<b>2120</b>	-										
400	5150	3360	2460	2400	<b>2240</b>	<b>2240</b>	-										
<b>R36</b>	23D/95R36 (9.5R36)	TL	<b>128A8/128B</b>	<b>W7x36</b> W8x36	1345	229	636	4078	160	2570	1670	1230	1190	1115	1115	-	
									200	2900	1890	1385	1350	1260	1260	-	
									240	3230	2105	1540	1500	1400	1400	-	
									280	3560	2320	1700	1655	1550	1550	-	
									320	3850	2510	1840	1790	1670	1670	-	
	360	4140	2700	1980	1925	<b>1800</b>	<b>1800</b>	-									
	400	4370	2850	2090	2030	<b>1900</b>	<b>1900</b>	-									
	27D/95R36 (11.2R36)	TL	<b>137A8/137B</b>	<b>W9x36</b> W8x36 W10x36	1422	283	663	4291	160	3280	2140	1570	1525	1425	1425	-	
									200	3700	2415	1770	1720	1610	1610	-	
									240	4125	2690	1970	1920	1790	1790	-	
280									4550	2970	2175	2115	1980	1980	-		
320									4920	3210	2350	2290	2140	2140	-		
360	5290	3450	2530	2460	<b>2300</b>	<b>2300</b>	-										
400	5590	3645	2670	2600	<b>2430</b>	<b>2430</b>	-										
<b>R38</b>	27D/95R38 (11.2R38)	TL	<b>138A8/138B</b>	<b>W9x38</b> W8x38 W10x38	1474	285	691	4450	160	3365	2195	1610	1565	1460	1460	-	
									200	3800	2480	1820	1770	1650	1650	-	
									240	4230	2760	2025	1970	1840	1840	-	
									280	4670	3040	2230	2170	2030	2030	-	
									320	5050	3290	2410	2350	2195	2195	-	
									360	5430	3540	2595	2525	<b>2360</b>	<b>2360</b>	-	
400	5750	3750	2750	2675	<b>2500</b>	<b>2500</b>	-										
<b>R40</b>	23D/95R40 (9.5R40)	TL	<b>135A8/135B</b>	<b>W7x40</b> W8x40	1454	228	662	4395	160	2910	1900	1390	1350	1260	1260	-	
									200	3310	2160	1580	1540	1440	1440	-	
									240	3710	2420	1775	1725	1610	1610	-	
									280	4060	2650	1940	1890	1765	1765	-	
									320	4360	2845	2085	2030	1900	1900	-	
									360	4710	3070	2250	2190	2050	2050	-	
400	5010	3270	2400	2330	<b>2180</b>	<b>2180</b>	-										

WWW.TIANLI-TYRE.COM



## TRACTOR RADIAL

R1 Defender | Defender (Row Crop) | Pattern R1

	tyre size	TT/TL	load/speed index	rims (preferred in bold)	unloaded		static loaded radius mm±2.5%	rolling circumference mm±2.5%	inflation pressure kpa	load capacity						tread depth mm	
					outer diameter mm	section width mm				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h		65 km/h
<b>R42</b>	23D/95R42 (9.5R42)	TL	<b>133A8/133B</b>	<b>W7x42</b> W8x42	1497	228	684	4527	160	2750	1790	1310	1280	1195	1195	-	
									200	3130	2040	1495	1455	1360	1360	-	
									240	3505	2290	1680	1630	1520	1520	-	
									280	3840	2500	1835	1785	1670	1670	-	
									320	4120	2690	1970	1920	1790	1790	-	
	360	4450	2905	2130	2070	1935	1935	-									
	400	4740	3090	2265	2200	<b>2060</b>	<b>2060</b>	-									
	27D/95R42 (11.2R42)	TL	<b>140A8/140B</b>	<b>W9x42</b> W8x42 W10x42	1580	283	744	4774	160	3565	2325	1705	1660	1550	1550	-	
									200	4025	2625	1925	1870	1750	1750	-	
									240	4485	2925	2145	2090	1950	1950	-	
280									4945	3225	2365	2300	2150	2150	-		
320									5350	3490	2560	2490	2325	2325	-		
360	5750	3750	2750	2675	<b>2500</b>	<b>2500</b>	-										
32D/80R42	TL	<b>141A8/141B</b>	<b>W10x42</b> W9x42 W11x42	1567	315	730	4771	160	5860	3820	2800	2730	2550	2550	-		
								200	4440	2900	2120	2065	1930	1930	-		
								240	4975	3245	2380	2310	2160	2160	-		
								280	5450	3550	2605	2535	2370	2370	-		
320	5920	3860	2830	2755	<b>2575</b>	<b>2575</b>	-										
<b>R44</b>	23D/95R44 (9.5R44)	TL	<b>132A8/132B</b>	<b>W7x44</b> W8x44	1547	229	735	4679	160	2850	1860	1360	1330	1240	1240	-	
									200	3220	2100	1540	1500	1400	1400	-	
									240	3590	2340	1715	1670	1560	1560	-	
									280	3955	2580	1890	1840	1720	1720	-	
									320	4280	2790	2045	1990	1860	1860	-	
	360	4600	3000	2200	2140	<b>2000</b>	<b>2000</b>	-									
	400	4875	3180	2330	2270	<b>2120</b>	<b>2120</b>	-									
	27D/95R44 (11.2R44)	TL	<b>141A8/141B</b>	<b>W9x44</b> W8x44 W10x44	1627	279	768	4917	160	3670	2395	1755	1710	1600	1600	-	
									200	4145	2700	1980	1930	1800	1800	-	
									240	4620	3010	2210	2150	2010	2010	-	
280									5090	3320	2435	2370	2215	2215	-		
320									5510	3590	2630	2560	2395	2395	-		
360	5920	3860	2830	2755	<b>2575</b>	<b>2575</b>	-										
400	6095	3975	2915	2835	<b>2650</b>	<b>2650</b>	-										
<b>R46</b>	27D/95R46 (11.2R46)	TL	<b>141A8/141B</b>	<b>W9x46</b> W8x46 W10x46	1677	282	798	5066	160	3670	2395	1755	1710	1600	1600	-	
									200	4145	2700	1980	1930	1800	1800	-	
									240	4620	3010	2210	2150	2010	2010	-	
									280	5090	3320	2435	2370	2215	2215	-	
									320	5510	3590	2630	2560	2395	2395	-	
									360	5920	3860	2830	2755	<b>2575</b>	<b>2575</b>	-	
400	6270	4090	3000	2915	<b>2725</b>	<b>2725</b>	-										

WWW.TIANLI-TYRE.COM





## TRACTOR RADIAL

R1 Defender | Defender (Row Crop) | Pattern R1



	tyre size	TT/TL	load/speed index	rims (preferred in bold)	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity							tread depth	
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	65 km/h		
					mm	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg		kg
<b>R46</b>	300/95R46 (12.4R46)	TL	<b>146A8/146B</b>	<b>W9x46</b> W10x46 W11x46	1732	305	815	5233	160	4280	2790	2045	1990	1860	1860	-		
										200	4830	3150	2310	2250	2100	2100	-	
										240	5380	3510	2570	2500	2340	2340	-	
										280	5930	3870	2840	2760	2580	2580	-	
										320	6420	4185	3070	2985	2790	2790	-	
										360	6900	4500	3300	3210	<b>3000</b>	<b>3000</b>	-	
				<b>148A8/148B</b>														
	320/90R46 (12.4R46)	TL	<b>146A8/146B</b>	<b>W10x46</b> W9x46 W11x46	1737	315	810	5248	160	4490	2930	2150	2090	1950	1950	-		
										200	5070	3310	2425	2360	2205	2205	-	
										240	5650	3685	2700	2630	2460	2460	-	
										280	6230	4060	2980	2900	2710	2710	-	
320										6900	4500	3300	3210	<b>3000</b>	<b>3000</b>	-		
360										7245	4725	3465	3370	<b>3150</b>	<b>3150</b>	-		
340/85R46	TL	<b>150A8/150B</b>	<b>W11x46</b> W12x46	1770	352	835	5345	160	4780	3115	2285	2220	2080	2080	-			
									200	5390	3520	2580	2510	2345	2345	-		
									240	6010	3920	2870	2795	2610	2610	-		
									280	6625	4320	3170	3080	2880	2880	-		
									320	7165	4670	3430	3330	3115	3115	-		
									360	7705	5025	3685	3585	<b>3350</b>	<b>3350</b>	-		
420/80R46	TL	<b>151A8/151B</b>	<b>DW13x46</b>	1848	398	849	5577	60	3490	2280	1685	1620	1520	1520	-			
									80	4125	2690	1990	1920	1790	1790	-		
									100	4680	3050	2260	2180	2035	2035	-		
									120	5240	3415	2530	2435	2280	2280	-		
									140	5710	3725	2760	2660	2480	2480	-		
									160	6190	4040	2990	2880	2690	2690	-		
									200	7060	4605	3410	3285	3070	3070	-		
									240	7935	5175	3830	3690	<b>3450</b>	<b>3450</b>	-		
									160	3020	1970	1445	1405	1310	1310	-		
									200	3410	2225	1630	1590	1480	1480	-		
<b>R48</b>	230/95R48 (9.5R48)	TL	<b>134A8/134B</b>	<b>W7x48</b> W8x48	1647	230	780	4984	160	3020	1970	1445	1405	1310	1310	-		
										200	3410	2225	1630	1590	1480	1480	-	
										240	3800	2480	1820	1770	1650	1650	-	
										280	4190	2735	2005	1950	1820	1820	-	
										320	4535	2960	2170	2110	1970	1970	-	
										360	4875	3180	2330	2270	<b>2120</b>	<b>2120</b>	-	
				<b>136A8/136B</b>														
	270/95R48 (11.2R48)	TL	<b>142A8/142B</b>	<b>W9x48</b> W8x48 W10x48	1734	286	821	5243	160	3780	2465	1810	1760	1640	1640	-		
										200	4270	2780	2040	1985	1855	1855	-	
										240	4750	3100	2270	2210	2070	2070	-	
										280	5240	3420	2510	2440	2280	2280	-	
										320	5670	3700	2710	2640	2465	2465	-	
360										6095	3975	2915	2835	<b>2650</b>	<b>2650</b>	-		
			<b>144A8/144B</b>															

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL



## TRACTOR RADIAL

R1 Defender | Defender (Row Crop) | Pattern R1



	tyre size	TT/TL	load/speed index	rims (preferred in bold)	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity							tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	65 km/h	
					mm	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	
<b>R48</b>	340/85R48	TL	<b>151A8/151B</b>	<b>W11x48</b> W12x48	1803	339	850	5463	160	4920	3210	2350	2290	2140	2140	-	
										200	5555	3620	2660	2580	2415	2415	-
										240	6190	4040	2960	2880	2690	2690	-
										280	6820	4450	3260	3175	2970	2970	-
										320	7380	4810	3530	3430	3210	3210	-
										360	7935	5175	3795	3690	<b>3450</b>	<b>3450</b>	-
			<b>152A8/152B</b>														
<b>R50</b>	320/90R50 (12.4R50)	TL	<b>148A8/148B</b>	<b>DW10x50</b>	1846	319	861	5540	60	2680	1750	1290	1250	1165	1165	-	
										80	3190	2080	1540	1480	1385	1385	-
										100	3620	2360	1750	1685	1575	1575	-
										120	4060	2645	1960	1890	1760	1760	-
										140	4420	2880	2130	2055	1920	1920	-
										160	4780	3120	2310	2225	2080	2080	-
										200	5430	3540	2620	2530	2360	2360	-
										240	6470	4220	3120	3010	2810	2810	-
										280	7090	4620	3420	3300	3080	3080	-
										320	7245	4725	3500	3370	<b>3150</b>	<b>3150</b>	-
			<b>150A8/150B</b>														
<b>R52</b>	300/95R52 (12.4R52)	TL	<b>149A8/149B</b>	<b>W9x52</b> W10x52 W11x52	1872	306	903	5527	160	4635	3020	2220	2155	2015	2015	-	
										200	5230	3410	2500	2430	2275	2275	-
										240	5830	3800	2790	2710	2535	2535	-
										280	6430	4190	3075	2990	2795	2795	-
										320	6950	4530	3325	3230	3020	3020	-
										360	7475	4875	3575	3480	<b>3250</b>	<b>3250</b>	-
			<b>151A8/151B</b>														
<b>R46</b>	VF380/90R46	TL	<b>173B/173D</b>	<b>DW13x46</b>	1868	395	868	5633	60	4635	3020	2240	2155	2075	2015	2015	
										80	5380	3510	2600	2500	2410	2340	2340
										100	6280	4095	3030	2920	2810	2730	2730
										120	6880	4485	3320	3200	3080	2990	2990
										140	7625	4970	3680	3550	3410	3315	3315
										160	8220	5360	3970	3825	3680	3575	3575
										200	9420	6140	4545	4380	4220	4095	4095
										240	10465	6825	5050	4870	4690	4550	4550
										280	11360	7410	5480	5285	5090	4940	4940
										320	12410	8090	5990	5770	5560	5395	5395
										360	13155	8580	6350	6120	5890	5720	5720
										400	14050	9165	6780	6540	6290	6110	6110
440	14950	9750	7215	6955	6695	<b>6500</b>	<b>6500</b>										

NEW

NEW

WWW.TIANLI-TYRE.COM



**TIANLI**

**TYRES YOU  
CAN RELY ON.**

# INDUSTRIAL TRACTOR RADIAL

# R4

Agro-Industrial Tyres



WWW.TIANLI-TYRE.COM



## INDUSTRIAL TRACTOR RADIAL

**R4** | Agro-Industrial Tyres | Pattern R4



- strong tread lugs for severe applications
- high traction on hard and abrasive surfaces
- reinforced lug base and middle for severe applications
- durable tyre
- robust and reinforced shoulders for advanced stability and cut resistance
- special bead protection



WWW.TIANLI-TYRE.COM

TRACTOR  
RADIAL

INDUSTRIAL  
TRACTOR RADIAL

FLOTATION  
RADIAL

FLOTATION  
DIAGONAL

IMPLEMENT  
RADIAL

IMPLEMENT  
DIAGONAL





## INDUSTRIAL TRACTOR RADIAL

R4 | Agro-Industrial Tyres | Pattern R4

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	
<b>R18</b>	280/80R18(10.5/80R18) IND	TL	<b>132A8/132B</b>	9.00	914	288	415	2736	160	2670	1450	1230	1205	1160	1160	28
									200	3035	1650	1400	1370	1320	1320	
									240	3400	1850	1570	1540	1480	1480	
									280	3725	2025	1720	1685	1620	1620	
									320	4000	2175	1840	1810	1740	1740	
									360	4320	2350	1990	1955	1880	1880	
	400	4600	2500	2120	2080	<b>2000</b>	<b>2000</b>									
	340/80R18(12.5/80R18) IND	TL	<b>143A8/143B</b>	11.00	996	353	442	2973	160	3635	1975	1675	1640	1580	1580	30
									200	4140	2250	1905	1870	1800	1800	
									240	4640	2520	2140	2100	2020	2020	
									280	5080	2760	2340	2295	2210	2210	
									320	5450	2960	2510	2465	2370	2370	
									360	5890	3200	2715	2660	2560	2560	
	400	6270	3405	2890	2830	<b>2725</b>	<b>2725</b>									
	400/70R18 (405/70R18) IND	TL	<b>147A8/147B</b>	13.00	1020	408	453	3048	160	4100	2230	1890	1855	1780	1780	33
									200	4670	2540	2150	2110	2030	2030	
									240	5230	2840	2410	2370	2275	2275	
									280	5730	3110	2640	2590	2490	2490	
320									6150	3340	2835	2780	2675	2675		
360									6650	3610	3060	3005	2890	2890		
400	7070	3840	3260	3200	<b>3075</b>	<b>3075</b>										
<b>R20</b>	280/80R20(10.5/80R20) IND	TL	<b>133A8/133B</b>	9.00	967	285	432	2901	160	2750	1490	1265	1240	1195	1195	28
									200	3130	1700	1440	1410	1360	1360	
									240	3505	1905	1615	1585	1520	1520	
									280	3840	2085	1770	1735	1670	1670	
									320	4120	2240	1900	1860	1790	1790	
									360	4450	2420	2050	2010	1935	1935	
	400	4740	2575	2180	2140	<b>2060</b>	<b>2060</b>									
	340/80R20(12.5/80R20) IND	TL	<b>144A8/144B</b>	11.00	1053	356	474	3151	160	3735	2030	1720	1690	1620	1620	30
									200	4250	2310	1960	1920	1850	1850	
									240	4765	2590	2195	2155	2070	2070	
									280	5215	2835	2400	2360	2270	2270	
									320	5600	3045	2580	2530	2435	2435	
									360	6050	3290	2790	2740	2630	2630	
	400	6440	3500	2970	2910	<b>2800</b>	<b>2800</b>									
	380/75R20(14.5R20) IND	TL	<b>148A8/148B</b>	12.00	1088	386	483	3249	160	4200	2280	1940	1900	1830	1830	33
									200	4780	2600	2200	2160	2080	2080	
									240	5360	2910	2470	2420	2330	2330	
									280	5870	3190	2705	2650	2550	2550	
320									6300	3425	2905	2850	2740	2740		
360									6810	3700	3140	3080	2960	2960		
400	7245	3940	3340	3275	<b>3150</b>	<b>3150</b>										

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL



## INDUSTRIAL TRACTOR RADIAL

R4 | Agro-Industrial Tyres | Pattern R4

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	
<b>R20</b>	400/70R20(16.0/70R20) IND	TL	<b>149A8/149B</b>	13.00	1072	408	476	3203	160	4335	2355	2000	1960	1885	1885	33
									200	4930	2680	2270	2230	2145	2145	
									240	5530	3005	2550	2500	2405	2405	
									280	6055	3290	2790	2740	2630	2630	
									320	6500	3530	3000	2940	2830	2830	
									360	7030	3820	3240	3180	3055	3055	
400	7475	4060	3445	3380	<b>3250</b>	<b>3250</b>										
<b>R24</b>	400/70R24(16.0/70R24) IND	TL	<b>152A8/152B</b>	13.00	1172	407	525	3515	160	4735	2570	2180	2140	2060	2060	33
									200	5390	2930	2480	2440	2340	2340	
									240	6040	3280	2785	2730	2630	2630	
									280	6610	3590	3050	2990	2875	2875	
									320	7100	3860	3270	3210	3090	3090	
									360	7675	4170	3540	3470	3340	3340	
	400	8165	4440	3760	3690	<b>3550</b>	<b>3550</b>									
	440/80R24(16.9R24) IND	TL	<b>161A8/161B</b>	14.00	1312	457	582	3923	160	6170	3350	2840	2790	2680	2680	36
									200	7020	3815	3235	3175	3050	3050	
									240	7870	4280	3630	3560	3420	3420	
									280	8615	4680	3970	3895	3745	3745	
									320	9255	5030	4265	4185	4020	4020	
360									10000	5430	4610	4520	4350	4350		
400	10640	5780	4900	4810	<b>4625</b>	<b>4625</b>										
460/70R24(17.5LR24) IND	TL	<b>159A8/159B</b>	15.00	1247	468	554	3732	160	5835	3170	2690	2640	2540	2540	36	
								200	6640	3610	3060	3000	2890	2890		
								240	7445	4050	3430	3370	3240	3240		
								280	8150	4430	3755	3685	3540	3540		
								320	8750	4760	4035	3960	3805	3805		
								360	9460	5140	4360	4280	4110	4110		
400	10060	5470	4640	4550	<b>4375</b>	<b>4375</b>										
500/70R24(19.5LR24) IND	TL	<b>164A8/164B</b>	16.00	1317	505	584	3938	160	6670	3625	3070	3015	2900	2900	36	
								200	7590	4125	3500	3430	3300	3300		
								240	8510	4625	3920	3850	3700	3700		
								280	9315	5060	4290	4210	4050	4050		
								320	10005	5440	4610	4520	4350	4350		
								360	10810	5875	4980	4890	4700	4700		
400	11500	6250	5300	5200	<b>5000</b>	<b>5000</b>										
<b>R26</b>	480/80R26(18.4R26) IND	TL	<b>160A8/160B</b>	15.00	1412	497	628	4103	160	6830	3710	3150	3090	2970	2970	36
									200	7760	4220	3580	3510	3375	3375	
									240	8690	4725	4010	3930	3780	3780	
									280	9520	5175	4390	4305	4140	4140	
320	10350	5625	4770	4680	<b>4500</b>	<b>4500</b>										

WWW.TIANLI-TYRE.COM



**INDUSTRIAL TRACTOR RADIAL**  
**R4** | Agro-Industrial Tyres | Pattern R4

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity						tread depth	
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h		
					inch	mm				mm	mm±2.5%	mm±2.5%	kpa	kg	kg		kg
<b>R28</b>	44D/80R28(16.9R28) IND	TL	<b>156A8/156B</b>	14.00	1416	456	637	4247		160	6070	3300	2800	2745	2640	2640	36
										200	6900	3750	3180	3120	3000	3000	
										240	7730	4200	3560	3490	3360	3360	
										280	8460	4600	3900	3830	3680	3680	
										320	9200	5000	4240	4160	<b>4000</b>	<b>4000</b>	

WWW.TIANLI-TYRE.COM



**TIANLI**

**TYRES YOU CAN RELY ON.**

FLOTATION  
 RADIAL

**Agro Grip**

Implement Low Pressure Tyres



WWW.TIANLI-TYRE.COM





**TIANLI**

**TYRES YOU CAN RELY ON.**



- high load capacity
- 65 km/h approval
- excellent self-cleaning properties for safe driving on and off-the-road
- low ground compaction
- specially suitable for transport on paved roads
- low rolling resistance for fuel saving and comfortable ride
- extended wear compound for enhanced tyre lifetime



WWW.TIANLI-TYRE.COM



**FLOTATION RADIAL**

**Agro Grip** | Implement Low Pressure Tyres | Pattern Agro Grip

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h	
					inch	mm				mm±2.5%	kg	kg	kg	kg	kg	kg	kg	
<b>R17</b>	<b>NEW</b> 500/50R17	TL	<b>149D</b>	16.00	932	503	418	2810	100	3065	2400	2105	2010	1810	1610	1425	1330	15
									120	3440	2690	2360	2260	2030	1810	1600	1495	
									160	4040	3160	2770	2650	2390	2120	1880	1755	
									200	4635	3630	3180	3040	2740	2440	2155	2015	
									240	5160	4040	3540	3385	3050	2710	2400	2240	
									280	5605	4390	3850	3680	3315	2950	2610	2440	
									320	6055	4740	4160	3975	3580	3185	2820	2630	
									360	7250	5675	4980	4760	4290	3815	3370	3150	
									400	6950	5440	4775	4560	4110	3660	3230	3020	
									450	7475	5850	5135	4910	4420	3930	3480	<b>3250</b>	
<b>R22.5</b>	500/60R22.5	TL	<b>155D</b>	16.00	1170	506	528	3509	100	3920	3070	2690	2575	2320	2060	1820	1705	25
									120	4370	3420	3000	2870	2580	2300	2030	1900	
									160	5170	4045	3550	3390	3060	2720	2405	2250	
									200	5880	4600	4040	3860	3480	3095	2740	2560	
									240	6595	5160	4530	4330	3900	3470	3070	2870	
									280	7220	5650	4960	4740	4270	3800	3360	3140	
									320	7750	6070	5330	5090	4585	4080	3610	3370	
									360	8380	6560	5755	5500	4950	4410	3900	3640	
									400	8910	6975	6120	5850	5270	4690	4145	<b>3875</b>	
										560/45R22.5	TL	<b>152D</b>	16.00	1072	538	480.5	3220	
120	4000	3130	2750	2630	2365	2105	1860	1740										
160	4735	3705	3250	3110	2800	2490	2200	2060										
200	5390	4220	3700	3540	3185	2835	2510	2340										
240	6040	4730	4150	3970	3570	3180	2810	2630										
280	6610	5175	4540	4340	3910	3480	3080	2875										
320	7100	5560	4880	4660	4200	3740	3305	3090										
360	7675	6010	5270	5040	4540	4040	3570	3340										
400	8165	6390	5610	5360	4830	4295	3800	<b>3550</b>										
	560/60R22.5	TL	<b>161D</b>	16.00	1256	562	559	3767										100
									120	5210	4080	3580	3420	3080	2740	2425	2265	
									160	6170	4830	4240	4050	3650	3245	2870	2680	
									200	7020	5495	4820	4610	4150	3690	3265	3050	
									240	7870	6160	5410	5170	4655	4140	3660	3420	
									280	8615	6740	5920	5660	5095	4530	4010	3745	
									320	9255	7240	6360	6075	5470	4870	4305	4020	
									360	10000	7825	6870	6565	5910	5260	4650	4350	
									400	10640	8325	7310	6980	6290	5595	4950	<b>4625</b>	
									<b>HD</b>	560/60R22.5 STEEL	TL	<b>164D</b>	16.00	1256	562	559	3767	100
120	5635	4410	3870	3700	3330	2965	2620	2450										
150	6440	5040	4420	4230	3810	3390	2995	2800										
160	6670	5220	4580	4380	3940	3510	3100	2900										
200	7590	5940	5210	4980	4490	3990	3530	3300										
240	8510	6660	5845	5590	5030	4480	3960	3700										
280	9315	7290	6400	6115	5510	4900	4330	4050										
320	10005	7830	6870	6570	5915	5260	4655	4350										
360	10810	8460	7425	7100	6390	5690	5030	4700										
400	11500	9000	7900	7550	6800	6050	5350	<b>5000</b>										

**HD** = heavy duty

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL





## FLOTATION RADIAL

Agro Grip | Implement Low Pressure Tyres | Pattern Agro Grip

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h	
					inch	mm				mm±2.5%	mm	kg	kg	kg	kg	kg	kg	
<b>R22.5</b>	600/50R22.5	TL	<b>159D</b>	20.00	1168	608	522	3507	100	4430	3465	3040	2910	2620	2330	2060	1925	
									120	4930	3860	3390	3240	2915	2590	2290	2140	
									150	5635	4410	3870	3700	3330	2965	2620	2450	
									160	5835	4570	4010	3830	3450	3070	2715	2540	
									200	6640	5200	4560	4360	3930	3490	3090	2890	
									240	7445	5830	5115	4890	4400	3920	3460	3240	
									280	8150	6380	5600	5350	4820	4290	3790	3540	
									320	8750	6850	6010	5750	5180	4605	4070	3805	
									360	9460	7400	6500	6210	5590	4975	4400	4110	
									400	10060	7875	6910	6605	5950	5290	4680	<b>4375</b>	
									100	4890	3825	3360	3210	2890	2570	2270	2125	
									120	5390	4220	3700	3540	3190	2835	2510	2340	
									160	6390	5000	4390	4200	3780	3360	2970	2780	
200	7270	5690	4990	4770	4300	3825	3380	3160										
240	8150	6380	5600	5350	4820	4285	3790	3540										
280	8900	6965	6110	5840	5260	4680	4140	3870										
320	9650	7550	6630	6340	5710	5080	4490	4200										
360	10280	8040	7060	6750	6080	5410	4780	4470										
400	10905	8535	7490	7160	6450	5740	5070	4740										
450	11780	9220	8090	7735	6970	6200	5480	5120										
500	12535	9810	8610	8230	7410	6595	5830	<b>5450</b>										
100	4810	3760	3300	3155	2840	2530	2235	2090										
120	5350	4190	3680	3515	3165	2815	2490	2330										
160	6340	4960	4350	4160	3750	3330	2950	2755										
200	7210	5640	4950	4730	4260	3790	3350	3135										
240	8085	6330	5550	5310	4780	4250	3760	3515										
280	8850	6925	6080	5810	5230	4655	4120	3850										
320	9505	7440	6530	6240	5620	5000	4420	4130										
360	10270	8040	7055	6740	6070	5400	4780	4465										
400	10925	8550	7505	7170	6460	5750	5080	<b>4750</b>										
100	4930	3860	3390	3240	2920	2595	2295	2145										
120	5490	4300	3770	3610	3250	2890	2555	2390										
160	6500	5090	4470	4270	3845	3420	3025	2830										
200	7400	5790	5080	4860	4375	3890	3440	3220										
240	8300	6490	5700	5450	4905	4365	3860	3610										
280	9080	7110	6240	5960	5370	4780	4225	3950										
320	9755	7630	6700	6400	5770	5130	4540	4240										
360	10540	8250	7240	6920	6230	5545	4900	4580										
400	11210	8775	7700	7360	6630	5900	5215	<b>4875</b>										

HD = heavy duty

WWW.TIANLI-TYRE.COM



## FLOTATION RADIAL

Agro Grip | Implement Low Pressure Tyres | Pattern Agro Grip

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h	
					inch	mm				mm±2.5%	mm	kg	kg	kg	kg	kg	kg	
<b>R22.5</b>	710/45R22.5	TL	<b>165D</b>	24.00	1202	718	538	3607	100	5210	4080	3580	3420	3080	2740	2425	2265	
									120	5800	4540	3990	3810	3430	3050	2700	2520	
									160	6870	5380	4720	4510	4060	3610	3195	2990	
									200	7820	6120	5370	5130	4620	4110	3640	3400	
									240	8765	6860	6020	5755	5180	4610	4080	3810	
									280	9590	7510	6590	6300	5670	5050	4460	4170	
									320	10305	8065	7080	6765	6090	5420	4790	4480	
									360	11130	8710	7650	7310	6580	5860	5180	4840	
									400	11845	9270	8140	7780	7000	6230	5510	<b>5150</b>	
									100	5210	4080	3580	3420	3080	2740	2425	2265	
									120	5800	4540	3990	3810	3430	3050	2700	2520	
									160	6870	5380	4720	4510	4060	3610	3195	2990	
									200	7820	6120	5370	5130	4620	4110	3640	3400	
240	8765	6860	6020	5755	5180	4610	4080	3810										
280	9590	7510	6590	6300	5670	5050	4460	4170										
320	10305	8065	7080	6765	6090	5420	4790	4480										
360	11130	8710	7650	7310	6580	5860	5180	4840										
400	11845	9270	8140	7780	7000	6230	5510	<b>5150</b>										
100	5360	4200	3685	3520	3170	2820	2495	2330										
120	5970	4675	4100	3920	3530	3140	2780	2600										
160	7070	5530	4860	4640	4180	3720	3290	3070										
200	8045	6295	5530	5280	4760	4230	3740	3500										
240	9020	7060	6200	5920	5330	4745	4200	3920										
280	9870	7730	6780	6480	5840	5195	4590	4290										
320	10605	8300	7285	6960	6270	5580	4930	4610										
360	11460	8970	7870	7520	6775	6030	5330	4980										
400	12190	9540	8370	8000	7210	6410	5670	<b>5300</b>										
100	5870	4590	4030	3850	3470	3090	2730	2550										
120	6540	5115	4490	4290	3865	3440	3040	2840										
160	7740	6055	5315	5080	4575	4070	3600	3360										
200	8800	6890	6050	5780	5205	4630	4095	3830										
240	9870	7725	6780	6480	5840	5190	4590	4290										
280	10805	8455	7420	7090	6390	5685	5030	4700										
320	11605	9080	7970	7620	6860	6105	5400	5045										
360	12540	9810	8610	8230	7415	6600	5830	5450										
400	13340	10440	9160	8760	7890	7020	6205	<b>5800</b>										
100	6730	5265	4620	4420	3980	3540	3130	2925										
120	7420	5805	5095	4870	4385	3900	3450	3225										
160	8800	6885	6040	5775	5200	4630	4090	3825										
200	10005	7830	6870	6570	5915	5260	4655	4350										
240	11210	8775	7700	7360	6630	5900	5215	4875										
280	12250	9585	8410	8040	7240	6440	5700	5325										
320	13280	10395	9125	8720	7850	6990	6180	5775										
360	14145	11070	9720	9290	8360	7440	6580	6150										
400	15010	11745	10310	9850	8870	7895	6980	6525										
500	17250	13500	11850	11325	10200	9075	8025	<b>7500</b>										

HD = heavy duty

WWW.TIANLI-TYRE.COM





## FLOTATION RADIAL

Agro Grip | Implement Low Pressure Tyres | Pattern Agro Grip

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h	
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	kg	
<b>R26.5</b>	710/50R26.5 STEEL	TL	<b>170D</b>	24.00	1368	728	613	4113		100	6070	4750	4170	3985	3590	3190	2825	2640
										120	6760	5290	4645	4440	4000	3560	3145	2940
										160	8000	6260	5500	5255	4730	4210	3720	3480
										200	9110	7130	6260	5980	5385	4790	4240	3960
										240	10210	7990	7015	6700	6040	5370	4750	4440
										280	11180	8750	7680	7340	6610	5880	5200	4860
										320	12005	9395	8250	7880	7100	6315	5585	5220
										360	12970	10150	8910	8515	7670	6820	6035	5640
										400	13800	10800	9480	9060	8160	7260	6420	<b>6000</b>
										100	6070	4750	4170	3985	3590	3190	2825	2640
										120	6760	5290	4645	4440	4000	3560	3145	2940
										160	8000	6260	5500	5255	4730	4210	3720	3480
										200	9110	7130	6260	5980	5385	4790	4240	3960
										240	10210	7990	7015	6700	6040	5370	4750	4440
280	11180	8750	7680	7340	6610	5880	5200	4860										
320	12005	9395	8250	7880	7100	6315	5585	5220										
360	12970	10150	8910	8515	7670	6820	6035	5640										
400	13800	10800	9480	9060	8160	7260	6420	<b>6000</b>										
<b>R30.5</b>	600/60R30.5 STEEL	TL	<b>173D</b>	20.00	1487	624	673	4477		100	6580	5150	4520	4320	3890	3460	3060	2860
										120	7325	5730	5030	4810	4330	3850	3410	3185
										160	8670	6785	5960	5690		4560	4030	3770
										200	9870	7720	6780	6480	5830	5190	4590	4290
										240	11060	8660	7600	7260	6540	5820	5150	4810
										280	12110	9480	8320	7950	7160	6370	5630	5265
										320	13010	10180	8935	8540	7690	6840	6050	5655
										360	14050	11000	9650	9225	8310	7390	6540	6110
										400	14950	11700	10270	9815	8840	7865	6955	<b>6500</b>
										100	6950	5440	4775	4560	4110	3660	3230	3020
										120	7665	6000	5265	5030	4530	4030	3565	3330
										160	9090	7115	6245	5970	5375	4780	4230	3950
										200	10340	8090	7100	6790	6110	5440	4810	4495
										240	11585	9070	7960	7610	6850	6095	5390	5040
280	12655	9905	8690	8310	7480	6660	5890	5500										
320	13725	10740	9430	9010	8115	7220	6385	5970										
360	14620	11440	10040	9595	8640	7690	6800	6355										
400	15510	12140	10650	10180	9170	8160	7210	6740										
450	16755	13110	11510	11000	9910	8815	7795	7285										
500	17825	13950	12245	11700	10540	9380	8290	<b>7750</b>										

NEW

HD

HD = heavy duty

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL



## FLOTATION RADIAL

Agro Grip | Implement Low Pressure Tyres | Pattern Agro Grip

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h	
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	kg	
<b>R30.5</b>	750/60R30.5 STEEL	TL	<b>181D</b>	24.00	1658	767	735	4986		100	8350	6530	5735	5480	4940	4390	3880	3630
										120	9300	7280	6390	6100	5500	4890	4325	4040
										160	11005	8610	7560	7225	6510	5790	5120	4785
										200	12520	9800	8600	8220	7405	6590	5825	5445
										240	14040	10990	9645	9220	8300	7390	6530	6105
										280	15370	12030	10560	10090	9090	8085	7150	6680
										320	16510	12920	11340	10840	9760	8685	7680	7180
										360	17840	13960	12250	11710	10550	9380	8300	7755
										400	18975	14850	13035	12460	11220	9980	8830	<b>8250</b>
										100	8600	6730	5910	5650	5085	4525	4000	3740
										120	9580	7500	6580	6290	5660	5040	4460	4165
										160	11340	8870	7790	7440	6705	5865	5275	4930
										200	12900	10100	8860	8470	7630	6790	6000	5610
										240	14470	11320	9940	9500	8550	7610	6730	6290
280	15835	12390	10880	10395	9360	8330	7370	6885										
320	17010	13310	11680	11165	10060	8950	7910	7395										
360	18380	14380	12620	12065	10865	9670	8550	7990										
									19550	15300	13430	12835	11560	10285	9095	<b>8500</b>		



WWW.TIANLI-TYRE.COM





**TIANLI**

TYRES YOU  
CAN RELY ON.

FLOTATION  
RADIAL

**Ride King**



WWW.TIANLI-TYRE.COM



FLOTATION RADIAL  
**Ride King**



- high load capacity
- 65 km/h approval
- excellent self-cleaning properties for safe driving on and off-the-road
- low ground compaction
- specially suitable for transport on paved roads
- low rolling resistance for fuel saving and comfortable ride
- extended wear compound for enhanced tyre lifetime



WWW.TIANLI-TYRE.COM

TRACTOR  
RADIAL

INDUSTRIAL  
TRACTOR RADIAL

FLOTATION  
RADIAL

FLOTATION  
DIAGONAL

IMPLEMENT  
RADIAL

IMPLEMENT  
DIAGONAL





**FLOTATION RADIAL**  
**Ride King**

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h	
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	kg	
<b>R22.5</b>	NEW 500/45R22.5	TL	<b>146D</b>	16.00	1022	503	468	3080	100	3035	2375	2085	1990	1795	1600	1410	1320	
									120	3380	2645	2320	2220	2000	1780	1570	1470	
									160	4000	3130	2750	2630	2365	2105	1860	1740	
									200	4550	3560	3130	2990	2690	2395	2120	1980	
									240	5105	3995	3510	3350	3020	2685	2375	2220	
									280	5590	4370	3840	3670	3305	2940	2600	2430	
									320	6000	4700	4120	3940	3550	3160	2790	2610	
									360	6485	5075	4455	4260	3835	3410	3020	2820	
									400	6900	5400	4740	4530	4080	3630	3210	3000	
									<b>R30.5</b>	NEW 750/60R30.5	TL	<b>181D</b>	24.00	1660	770	738	4992	100
120	9300	7280	6390	6100	5500	4890	4325	4040										
160	11005	8610	7560	7225	6510	5790	5120	4785										
200	12520	9800	8600	8220	7405	6590	5825	5445										
240	14040	10990	9645	9220	8300	7390	6530	6105										
280	15370	12030	10560	10090	9090	8085	7150	6680										
320	16510	12920	11340	10840	9760	8685	7680	7180										
360	17840	13960	12250	11710	10550	9380	8300	7755										
400	18975	14850	13035	12460	11220	9980	8830	8250										

WWW.TIANLI-TYRE.COM



**TIANLI**

**TYRES YOU CAN RELY ON.**

FLOTATION  
RADIAL

**F1 Traction**

Implement Low Pressure Tyres



WWW.TIANLI-TYRE.COM



## FLOTATION RADIAL

F1 Traction | Implement Low Pressure Tyres | Pattern F1 Traction



- high load capacity
- 65 km/h approval
- good self-cleaning properties
- suitable for grassland
- low ground compaction
- low rolling resistance
- suitable for on/off-the-road agricultural service on tractors, trailers and agricultural implements



WWW.TIANLI-TYRE.COM



## FLOTATION RADIAL

F1 Traction | Implement Low Pressure Tyres | Pattern F1 Traction

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h	
					inch	mm				kg	kg	kg	kg	kg	kg	kg	kg	
R17	500/50R17	TL	145D	16.00	925	497	412	2780	100	2935	2300	2015	1930	1735	1540	1365	1275	
									120	3270	2560	2245	2145	1930	1720	1520	1420	
									160	3870	3030	2660	2540	2290	2035	1800	1680	
									200	4400	3445	3020	2890	2600	2315	2050	1910	
									240	4935	3860	3390	3240	2920	2600	2295	2145	
									280	5400	4230	3710	3550	3195	2840	2510	2350	
									320	5800	4540	3985	3810	3430	3050	2700	2520	
									360	6270	4910	4310	4115	3710	3300	2920	2725	
									400	6670	5220	4580	4380	3940	3510	3100	<b>2900</b>	
R22.5	500/60R22.5	TL	155D	16.00	1186	483	537	3558	100	3920	3070	2690	2575	2320	2060	1820	1705	
									120	4370	3420	3000	2870	2580	2300	2030	1900	
									160	5170	4045	3550	3390	3060	2720	2405	2250	
									200	5880	4600	4040	3860	3480	3095	2740	2560	
									240	6595	5160	4530	4330	3900	3470	3070	2870	
									280	7220	5650	4960	4740	4270	3800	3360	3140	
									320	7750	6070	5330	5090	4585	4080	3610	3370	
									360	8380	6560	5755	5500	4950	4410	3900	3640	
									400	8910	6975	6120	5850	5270	4690	4145	<b>3875</b>	
									100	3590	2810	2470	2360	2120	1890	1670	1560	
									120	4000	3130	2750	2630	2365	2105	1860	1740	
									160	4735	3705	3250	3110	2800	2490	2200	2060	
									200	5390	4220	3700	3540	3185	2835	2510	2340	
									240	6040	4730	4150	3970	3570	3180	2810	2630	
									280	6610	5175	4540	4340	3910	3480	3080	2875	
									320	7100	5560	4880	4660	4200	3740	3305	3090	
									360	7675	6010	5270	5040	4540	4040	3570	3340	
									400	8165	6390	5610	5360	4830	4300	3800	<b>3550</b>	
100	4680	3660	3215	3070	2770	2460	2180	2035										
120	5210	4080	3580	3420	3080	2740	2425	2265										
160	6170	4830	4240	4050	3650	3245	2870	2680										
200	7020	5495	4820	4610	4150	3690	3265	3050										
240	7870	6160	5410	5170	4655	4140	3660	3420										
280	8615	6740	5920	5660	5095	4530	4010	3745										
320	9255	7240	6360	6075	5470	4870	4305	4020										
360	10000	7825	6870	6565	5910	5260	4650	4350										
400	10640	8325	7310	6980	6290	5595	4950	<b>4625</b>										
100	4430	3465	3040	2910	2620	2330	2060	1925										
120	4930	3860	3390	3240	2915	2590	2290	2140										
150	5485	4290	3770	3600	3240	2885	2550	2385										
160	5840	4570	4010	3830	3450	3070	2715	2540										
200	6640	5200	4560	4360	3930	3490	3090	2890										
240	7445	5830	5115	4890	4400	3920	3460	3240										
280	8150	6380	5600	5350	4820	4290	3790	3540										
320	8750	6850	6010	5750	5180	4605	4070	3805										
360	9460	7400	6500	6210	5590	4975	4400	4110										
400	10060	7875	6910	6605	5950	5290	4680	<b>4375</b>										

WWW.TIANLI-TYRE.COM





## FLOTATION RADIAL

**F1 Traction** | Implement Low Pressure Tyres | Pattern F1 Traction

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h	
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	kg	
<b>R22.5</b>	710/45R22.5	TL	<b>165D</b>	24.00	1189	678	530	3567	100	5210	4080	3580	3420	3080	2740	2425	2265	
									120	5800	4540	3990	3810	3430	3050	2700	2520	
									160	6870	5380	4720	4510	4060	3610	3195	2990	
									200	7820	6120	5370	5130	4620	4110	3640	3400	
									240	8765	6860	6020	5755	5180	4610	4080	3810	
									280	9590	7510	6590	6300	5670	5050	4460	4170	
									320	10305	8065	7080	6765	6090	5420	4790	4480	
									360	11130	8710	7650	7310	6580	5860	5180	4840	
									400	11845	9270	8140	7780	7000	6230	5510	<b>5150</b>	
<b>R26.5</b>	600/55R26.5	TL	<b>165D</b>	20.00	1361	587	608	4046	100	5210	4080	3580	3420	3080	2740	2425	2265	
									120	5800	4540	3990	3810	3430	3050	2700	2520	
									160	6870	5380	4720	4510	4060	3610	3195	2990	
									200	7820	6120	5370	5130	4620	4110	3640	3400	
									240	8765	6860	6020	5755	5180	4610	4080	3810	
									280	9590	7510	6590	6300	5670	5050	4460	4170	
									320	10305	8065	7080	6765	6090	5420	4790	4480	
									360	11130	8710	7650	7310	6580	5860	5180	4840	
									400	11845	9270	8140	7780	7000	6230	5510	<b>5150</b>	
									<b>R26.5</b>	710/50R26.5	TL	<b>170D</b>	24.00	1342	678	596	4034	100
120	6760	5290	4645	4440	4000	3560	3145	2940										
160	8000	6260	5500	5255	4730	4210	3720	3480										
200	9110	7130	6260	5980	5385	4790	4240	3960										
240	10210	7990	7015	6700	6040	5370	4750	4440										
280	11180	8750	7680	7340	6610	5880	5200	4860										
320	12005	9395	8250	7880	7100	6315	5585	5220										
360	12970	10150	8910	8515	7670	6820	6035	5640										
400	13800	10800	9480	9060	8160	7260	6420	<b>6000</b>										

WWW.TIANLI-TYRE.COM



# TIANLI

TYRES YOU CAN RELY ON.

## FLOTATION DIAGONAL

# FL | FL1 | FT-A

Implement Low Pressure Tyres



WWW.TIANLI-TYRE.COM



## FLOTATION DIAGONAL

FL | FL1 | FT-A | | Implement Low Pressure Tyres



**FL**  
tread depth  
25mm

**FL1**  
tread depth  
20mm

**FTA**  
tread depth  
35mm

- tubeless flotation tyre offers good self-cleaning characteristics
- suitable for all agricultural implements especially for towed vehicles
- offers high load capacity at low inflation pressures thus preventing damages to fields and crops
- tyre for on and off-the-road agricultural service on trailers, tractors and large implements
- it offers enhanced durability due to the strong casing construction and compounds used



WWW.TIANLI-TYRE.COM



## FLOTATION DIAGONAL

FL | FL1 | FT-A | | Implement Low Pressure Tyres

	tyre size	TT/TL	Pattern	Ply Rating	load/speed index		measured rim width	unloaded		inflation pressure	load capacity								tread depth
					free rolling	drive wheel		section width	outer diameter		free rolling				drive wheel				
											10 km/h	25 km/h	40 km/h	50 km/h	10 km/h	25 km/h	40 km/h	50 km/h	
inch	mm	mm	kpa	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm					
15.5 inch	400/60-15.5	TL	FL	14	145A8	132A8	13.00	405	875	360	4060	3450	2900	2610	2800	2380	2000	1800	16.0
	500/60-22.5	TL	FL	12	157A8	145A8	16.00	510	1180	240	5780	4910	4125	3710	4060	3450	2900	2610	25.5
22.5 inch	500/60-22.5	TL	FL1	16	163A8	151A8	16.00	476	1170	320	6830	5800	4875	4390	4830	4110	3450	3110	20.0
	500/60-22.5	TL	FL1	12	157A8	145A8	16.00	476	1170	240	5780	4910	4125	3710	4060	3450	2900	2610	20.0
	500/60-22.5	TL	FL1	16	163A8	151A8	16.00	476	1170	320	6830	5800	4875	4390	4830	4110	3450	3110	20.0
	500/60-22.5	TL	FTA	12	157A8	145A8	16.00DC	500	1170	240	5780	4910	4125	3710	4060	3450	2900	2610	35.0
	500/60-22.5	TL	FTA	16	163A8	151A8	16.00DC	500	1170	320	6830	5800	4875	4390	4830	4110	3450	3110	35.0
	550/60-22.5	TL	FL	12	160A8	148A8	16.00DC	550	1238	230	6300	5360	4500	4050	4410	3750	3150	2840	25.0
	550/60-22.5	TL	FL	16	167A8	154A8	16.00DC	550	1238	300	7630	6490	5450	4910	5250	4480	3750	3380	25.0
	550/60-22.5	TL	FL1	12	160A8	148A8	16.00DC	550	1238	230	6300	5360	4500	4050	4410	3750	3150	2840	20.0
	550/60-22.5	TL	FL1	16	167A8	154A8	16.00DC	550	1238	300	7630	6490	5450	4910	5250	4480	3750	3380	20.0
	600/50-22.5	TL	FL	12	159A8	147A8	20.00	610	1180	200	6130	5210	4375	3940	4310	3660	3075	2770	25.5
600/50-22.5	TL	FL	16	165A8	153A8	20.00	610	1180	260	7210	6130	5150	4640	5110	4340	3650	3290	25.5	
600/50-22.5	TL	FL1	12	159A8	147A8	20.00	576	1170	200	6130	5210	4375	3940	4310	3660	3075	2770	20.0	
600/50-22.5	TL	FL1	16	165A8	153A8	20.00	576	1170	260	7210	6130	5150	4640	5110	4340	3650	3290	20.0	
600/55-22.5	TL	FL	12	164A8	151A8	20.00	600	1270	200	7000	5950	5000	4500	4830	4110	3450	3110	25.5	
600/55-22.5	TL	FL	16	169A8	156A8	20.00	600	1270	260	8120	6900	5800	5220	5600	4760	4000	3600	25.5	
700/40-22.5	TL	FL	12	160A8	148A8	24.00	710	1180	200	6300	5360	4500	4050	4410	3750	3150	2840	25.5	
700/40-22.5	TL	FL	16	166A8	154A8	24.00	710	1180	260	7420	6310	5300	4770	5250	4460	3750	3380	25.5	
700/40-22.5	TL	FL1	12	160A8	148A8	24.00	676	1170	200	6300	5360	4500	4050	4410	3750	3150	2840	20.0	
700/40-22.5	TL	FL1	16	166A8	154A8	24.00	676	1170	260	7420	6310	5300	4770	5250	4460	3750	3380	20.0	
700/40-22.5	TL	FL1	18	168A8	156A8	24.00	676	1170	340	7840	6660	5600	5040	5600	4750	4000	3600	20.0	
700/50-22.5	TL	FL	12	168A8	156A8	24.00	700	1270	220	7840	6660	5600	5040	5600	4760	4000	3600	20.0	
700/50-22.5	TL	FL	16	174A8	162A8	24.00	700	1270	280	9380	7970	6700	6030	6650	5650	4750	4280	20.0	
700/50-22.5	TL	FL	12	165A8	153A8	20.00	591	1333	200	7210	6130	5150	4640	5110	4340	3650	3290	25.0	
700/50-22.5	TL	FL	16	170A8	159A8	20.00	591	1333	260	8400	7140	6000	5400	6130	5210	4375	3940	25.0	
700/50-22.5	TL	FL	12	169A8	157A8	24.00	700	1333	180	8120	6900	5800	5220	5780	4910	4125	3710	25.0	
700/50-22.5	TL	FL	16	174A8	162A8	24.00	700	1333	240	9380	7970	6700	6030	6650	5650	4750	4280	25.0	
800/45-26.5	TL	FL	12	170A8	158A8	28.00	800	1333	170	8400	7140	6000	5400	5950	5060	4250	3830	25.0	
800/45-26.5	TL	FL	16	177A8	164A8	28.00	800	1333	220	10220	8690	7300	6570	7000	5950	5000	4500	25.0	
30.5 inch	650/60-30.5	TL	FL	12	174A8	162A8	20.00	650	1670	170	9380	7970	6700	6030	6650	5650	4750	4280	25.4
	650/60-30.5	TL	FL	16	179A8	167A8	20.00	650	1670	220	10850	9220	7750	6980	7630	6490	5450	4910	25.4
	650/60-30.5	TL	FL	12	176A8	164A8	24.00	750	1670	170	9940	8450	7100	6390	7000	5950	5000	4500	25.4
	650/60-30.5	TL	FL	16	182A8	170A8	24.00	750	1670	220	11900	10120	8500	7650	8400	7140	6000	5400	25.4
	650/60-30.5	TL	FL	12	180A8	168A8	28.00	850	1670	150	11200	9520	8000	7200	7840	6660	5600	5040	25.4
	650/60-30.5	TL	FL	16	186A8	174A8	28.00	850	1670	220	13300	11310	9500	8550	9380	7970	6700	6030	25.4
850/50-30.5	TL	FL	18	193A8	180A8	28.00	850	1670	300	16100	13690	11500	10350	11200	9520	8000	7200	25.4	

WWW.TIANLI-TYRE.COM





**TIANLI**

**TYRES YOU  
CAN RELY ON.**

IMPLEMENT  
RADIAL

# Grass King

Implement Tyres



WWW.TIANLI-TYRE.COM



## IMPLEMENT RADIAL

**Grass King** | Implement Tyres | Pattern Grass King



- wide contact area for even ground pressure distribution at low inflation pressure
- 65 km/h approval
- superior ground protection on grassland and other surfaces
- well balanced pattern design for a great variety of applications
- suitable for municipality vehicles, two-axle mower and multipurpose transporter
- excellent drive comfort even on long distances



WWW.TIANLI-TYRE.COM

TRACTOR  
RADIAL

INDUSTRIAL  
TRACTOR RADIAL

FLOTATION  
RADIAL

FLOTATION  
DIAGONAL

IMPLEMENT  
RADIAL

IMPLEMENT  
DIAGONAL



## IMPLEMENT RADIAL

Grass King | Implement Tyres | Pattern Grass King

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth					
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h						
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	kg		kg	kg	kg		
<b>R15</b>	31x15.50R15 IMP	TL	<b>122B</b>	13LB	792	391	355	2378	100	1860	1215	900	870	810	810								
									120	2070	1350	1000	960	900									
									160	2480	1620	1200	1155	1080									
									200	2830	1845	1365	1315	1230									
									240	3140	2050	1515	1460	1365									
<b>R17</b>	425/55R17 IMP	TL	<b>137D</b>	13.00	890	421	398	2670	100	2540	1990	1740	1670	1500	1335	1180	1100						
									120	2800	2190	1925	1840	1660	1475	1300	1220						
									160	3330	2610	2290	2190	1970	1750	1550	1450						
									200	3810	2980	2615	2500	2250	2000	1770	1655						
									240	4230	3310	2910	2780	2500	2225	1970	1840						
									280	4600	3600	3160	3020	2720	2420	2140	2000						
									320	4970	3890	3415	3265	2940	2615	2310	2160						
									350	5290	4140	3630	3470	3130	2780	2460	<b>2300</b>						
									100	2330	1820	1600	1530	1375	1225	1080	1010						
									120	2590	2030	1780	1700	1530	1360	1205	1130						
									160	3070	2400	2110	2010	1810	1610	1430	1330						
<b>R17</b>	19.0/45R17 IMP	TL	<b>137D</b>	16.00	858	477	396	2578	100	3490	2730	2400	2290	2060	1840	1620	1520						
									240	3915	3060	2690	2570	2315	2060	1820	1700						
									280	4285	3350	2940	2810	2530	2250	1990	1860						
									320	4600	3600	3160	3020	2720	2420	2140	2000						
									360	4970	3890	3415	3265	2940	2615	2310	2160						
									400	5290	4140	3630	3470	3130	2780	2460	<b>2300</b>						
									100	3035	2375	2085	1990	1795	1600	1410	1320						
									120	3380	2645	2320	2220	2000	1780	1570	1470						
									160	4000	3130	2750	2630	2365	2105	1860	1740						
									200	4550	3560	3130	2990	2690	2395	2120	1980						
									<b>R17</b>	500/50R17 IMP	TL	<b>146D</b>	16.00	924	492	415	2773	240	5105	3995	3510	3350	3020
280	5590	4370	3840	3670	3305	2940	2600	2430															
320	6000	4700	4120	3940	3550	3160	2790	2610															
360	6485	5075	4455	4260	3835	3410	3020	2820															
400	6900	5400	4740	4530	4080	3630	3210	<b>3000</b>															
100	2990	2340	2050	1960	1770	1570	1390	1300															
120	3335	2610	2290	2190	1970	1755	1550	1450															
160	3970	3105	2725	2605	2345	2090	1845	1725															
200	4485	3510	3080	2945	2650	2360	2090	1950															
240	5000	3915	3440	3280	2960	2630	2330	2175															
280	5520	4320	3790	3620	3260	2900	2570	2400															
<b>R20</b>	480/50R20 IMP	TL	<b>140D</b>	16.00	997	478	448	2997	100	2990	2340	2050	1960	1770	1570	1390	1300						
									120	3335	2610	2290	2190	1970	1755	1550	1450						
									160	3970	3105	2725	2605	2345	2090	1845	1725						
									200	4485	3510	3080	2945	2650	2360	2090	1950						
									240	5000	3915	3440	3280	2960	2630	2330	2175						
280	5520	4320	3790	3620	3260	2900	2570	2400															
300	5750	4500	3950	3775	3400	3025	2675	<b>2500</b>															

WWW.TIANLI-TYRE.COM

TRACTOR RADIAL

INDUSTRIAL TRACTOR RADIAL

FLOTATION RADIAL

FLOTATION DIAGONAL

IMPLEMENT RADIAL

IMPLEMENT DIAGONAL



## IMPLEMENT RADIAL

Grass King | Implement Tyres | Pattern Grass King

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth					
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h						
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	kg		kg	kg	kg		
<b>R22.5</b>	500/45R22.5 IMP	TL	<b>146D</b>	16.00	1028	493	466	3097	100	3035	2375	2085	1990	1795	1600	1410	1320						
									120	3380	2645	2320	2220	2000	1780	1570	1470						
									160	4000	3130	2750	2630	2365	2105	1860	1740						
									200	4550	3560	3130	2990	2690	2395	2120	1980						
									240	5105	3995	3510	3350	3020	2685	2375	2220						
									280	5590	4370	3840	3670	3305	2940	2600	2430						
									320	6000	4700	4120	3940	3550	3160	2790	2610						
									360	6485	5075	4455	4260	3835	3410	3020	2820						
									400	6900	5400	4740	4530	4080	3630	3210	<b>3000</b>						

WWW.TIANLI-TYRE.COM






**TIANLI**

**TYRES YOU  
CAN RELY ON.**

# IMPLEMENT RADIAL

# R305

Implement Tyres

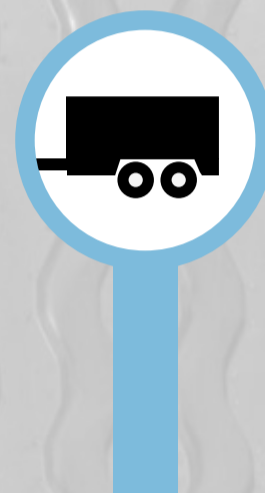

WWW.TIANLI-TYRE.COM




## IMPLEMENT RADIAL

**R305** | Implement Tyres | Pattern R305



- wide contact area for even ground pressure distribution at low inflation pressure.
- 65 km/h approval
- superior ground protection on grassland and other surfaces
- well balanced pattern design for a great variety of applications
- suitable for municipality vehicles
- excellent drive comfort even on long distances

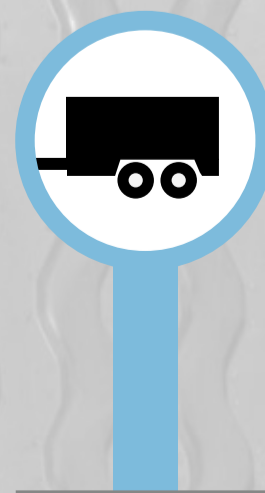

WWW.TIANLI-TYRE.COM

TRACTOR  
RADIAL

INDUSTRIAL  
TRACTOR RADIAL

FLOTATION  
RADIAL

FLOTATION  
DIAGONAL

IMPLEMENT  
RADIAL

IMPLEMENT  
DIAGONAL



# IMPLEMENT RADIAL

**R305** | Implement Tyres | Pattern R305

	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth		
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h			
					inch	mm				mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	kg		kg	kg
<b>R17</b>	500/50R17	TL	<b>146D</b>	16.00	927	500	406	2793		<b>LLV*</b>	100	3105	2430	2130	2040	1835	1630	1445	1350	10
											120	3510	2745	2410	2300	2070	1845	1630	1525	
											160	4140	3240	2840	2720	2450	2180	1925	1800	
											200	4715	3690	3240	3095	2790	2480	2190	2050	
											240	5230	4095	3595	3435	3090	2750	2430	2275	
											280	5750	4500	3950	3775	3400	3025	2675	<b>2500</b>	
										<b>HLV**</b>	100	3105	2430	2130	2040	1835	1630	1445	1350	
											120	3450	2700	2370	2265	2040	1815	1605	1500	
											160	4140	3240	2840	2720	2450	2180	1925	1800	
											200	4690	3670	3220	3080	2770	2470	2180	2040	
											240	5240	4100	3600	3440	3100	2760	2440	2280	
											280	5730	4480	3930	3760	3385	3010	2660	2490	
											320	6210	4860	4265	4080	3670	3270	2890	2700	
											360	6620	5180	4550	4350	3920	3485	3080	2880	
380	6900	5400	4740	4530	4080	3630	3210	<b>3000</b>												

Note: **\*LLV** (Low Load Variation): other machines  
**\*\*HLV** (High Load Variation): trailer use

WWW.TIANLI-TYRE.COM



# TIANLI

TYRES YOU CAN RELY ON.

## TRACTION IMPLEMENT

# R100

Implement Tyres



WWW.TIANLI-TYRE.COM





## TRACTION IMPLEMENT

R100 | Implement Tyres | Pattern R100



- the tyre offers good traction on uneven ground
- excellent lateral stability due to reinforced casing construction
- low ground compaction through wide contact area
- special wear resistant tread compound for enhanced performance
- suitable for grassland operations



WWW.TIANLI-TYRE.COM



## TRACTION IMPLEMENT

R100 | Implement Tyres | Pattern R100

R100 RADIAL	tyre size	TT/TL	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth	
					outer diameter	section width				static	10 km/h	25 km/h	30 km/h	40 km/h	50 km/h	60 km/h	65 km/h		
					inch	mm				kg	kg	kg	kg	kg	kg	kg	kg		
R15	31x15.50R15	TL	122B	13LB	792	391	355	2374	100	1860	1215	900	870	810	810				19
									120	2070	1350	1000	960	900	900				
									160	2480	1620	1200	1155	1080	1080				
									200	2830	1845	1365	1315	1230	1230				
									240	3140	2050	1515	1460	1365	1365				
280	3450	2250	1665	1605	1500	1500													
R17	425/55R17	TL	134D	13.00	881	425	398	2635	100	2340	1830	1610	1540	1380	1230	1090	1020		27
									120	2580	2020	1775	1700	1530	1360	1200	1120		
									160	3070	2400	2110	2020	1815	1615	1430	1335		
									200	3510	2750	2410	2305	2075	1850	1630	1525		
									240	3900	3050	2680	2560	2310	2050	1815	1695		
									280	4240	3320	2910	2785	2510	2230	1970	1840		
									320	4580	3590	3150	3010	2710	2410	2130	1990		
									350	4875	3815	3350	3200	2880	2565	2270	2120		
NEW	500/50R17	TL	145D	16.00	920	499	409	2765	100	2935	2300	2015	1930	1735	1540	1365	1275		25
									120	3270	2560	2245	2145	1930	1720	1520	1420		
									160	3870	3030	2660	2540	2290	2035	1800	1680		
									200	4400	3445	3020	2890	2600	2315	2050	1910		
									240	4935	3860	3390	3240	2920	2600	2295	2145		
									280	5400	4230	3710	3550	3195	2840	2510	2350		
									320	5800	4540	3985	3810	3430	3050	2700	2520		
									360	6270	4910	4310	4115	3710	3300	2920	2725		
400	6670	5220	4580	4380	3940	3510	3100	2900											

R100 DIAGONAL	tyre size	TT/TL	Ply Rating	load/speed index		measured rim width	unloaded		static loaded radius	rolling circumference	inflation pressure	load capacity								tread depth
				Free Rolling	Drive Wheel		outer diameter	section width				free rolling				drive wheel				
				inch	mm		mm	10 km/h				25 km/h	40 km/h	50 km/h	10 km/h	25 km/h	40 km/h	50 km/h		
-15.3	NEW 10.0/75-15.3	TL	10	123A8	111A8	9.00	790	270	350	2367	390	2170	1845	1550	1395	1525	1300	1090	980	23
	NEW 11.5/80-15.3	TL	12	135A8	123A8	9.00	870	300	391	2597	410	3050	2590	2180	1960	2170	1845	1550	1395	23
-17	NEW 15.0/55-17 IMP	TL	10	134A8	122A8	13.00	872	388	392	2608	260	2970	2520	2120	1910	2100	1785	1500	1350	23
	NEW 14	141A8	129A8	360	3605						3060	2575	2320	2590	2200	1850	1665			
	NEW 14	144A8	131A8	280	3920						3330	2800	2520	2730	2320	1950	1755			
NEW 16	146A8	133A8	16.00	865	465	387	2592	300	4200	3570	3000	2700	2880	2450	2060	1850	25			

WWW.TIANLI-TYRE.COM



**TIANLI**

**TYRES YOU  
CAN RELY ON.**

# IMPLEMENT DIAGONAL

## F302

## F303

## F304



[WWW.TIANLI-TYRE.COM](http://WWW.TIANLI-TYRE.COM)

### IMPLEMENT DIAGONAL

**F302 | F303 | F304** | Implement Tyres



**F302**

**F303**

**F304**

- popular tread developed for implements and trailers in soil tillage and transport applications
- ideal for modern farming under all conditions and suitable for a wide range of applications
- the construction ensures good stability in the field and on the road
- tough casing construction offers special resistance to damage from impact



[WWW.TIANLI-TYRE.COM](http://WWW.TIANLI-TYRE.COM)

TRACTOR  
RADIAL

INDUSTRIAL  
TRACTOR RADIAL

FLOTATION  
RADIAL

FLOTATION  
DIAGONAL

IMPLEMENT  
RADIAL

IMPLEMENT  
DIAGONAL





# IMPLEMENT DIAGONAL

F302 | F303 | F304 | Implement Tyres

F302 BIAS TYRES	tyre size	TT/TL	Pattern	Ply Rating	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	Inflation pressure	load capacity				tread depth
							section width	outer diameter				free rolling				
												10 km/h	25 km/h	30 km/h	40 km/h	
free rolling	inch	mm	mm	mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	mm					
<b>-15.3</b>	10.0/75-15.3 IMP	TL	F302	10	<b>123A8</b>	9.00	274	760	343	2227	520	2170	1845	1735	<b>1550</b>	10
				14	<b>130A8</b>							710	2660	2260	2130	
		11.5/80-15.3 IMP	TL	F302	10	<b>131A8</b>	9.00	297	844	370	2473	460	2730	2320	2180	<b>1950</b>
			14	<b>139A8</b>	650	3400							2890	2720	<b>2430</b>	
	12.5/80-15.3 IMP	TL	F302	14	<b>142A8</b>	9.00	312	885	387	2593	<b>430</b>	3710	3150	2970	<b>2650</b>	12
<b>-16</b>	13.0/75-16 IMP	TL	F302	12	<b>138A8</b>	11	340	890	396	2726	<b>380</b>	3300	2810	2640	<b>2360</b>	12
<b>-18</b>	10.5/80-18 IMP	TL	F302	14	<b>138A8</b>	W9	275	885	395	2593	700	3300	2810	2640	<b>2360</b>	11
				12	<b>142A8</b>							500	3710	3150	2970	
		13.0/65-18 IMP	TL	F302	16	<b>144A8</b>	11	336	890	398	2608	<b>675</b>	3920	3330	3135	<b>2800</b>



F303 BIAS TYRES	tyre size	TT/TL	Pattern	Ply Rating	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	Inflation pressure	load capacity				tread depth
							section width	outer diameter				free rolling				
												10 km/h	25 km/h	30 km/h	40 km/h	
free rolling	inch	mm	mm	mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	mm					
<b>-17</b>	15.0/55-17 IMP	TL	F303	10	<b>134A8</b>	13.00	391	850	377	2490	360	2970	2520	2370	<b>2120</b>	12
				14	<b>141A8</b>							490	3605	3060	2880	



F304 BIAS TYRES	tyre size	TT/TL	Pattern	Ply Rating	load/speed index	measured rim width	unloaded		static loaded radius	rolling circumference	Inflation pressure	load capacity				tread depth
							section width	outer diameter				free rolling				
												10 km/h	25 km/h	30 km/h	40 km/h	
free rolling	inch	mm	mm	mm±2.5%	mm±2.5%	kpa	kg	kg	kg	kg	mm					
<b>-17</b>	19.0/45-17 IMP	TL	F304	14	<b>144A8</b>	16.00	491	866	380	2536	390	3920	3330	3135	<b>2800</b>	12
				14	<b>152A8</b>							416	2750	<b>380</b>	4970	



WWW.TIANLTYRE.COM

# CONVERSION TABLE

tyre dimension	standard series 85/80	standard series 70	standard series 65	special width on measured rim (1)	row crop narrow		municipality tyres 80/70/65er series	duals/twin tyres
					inches	metric		
7.5L-15				240/70R16				
6.50-16		260/70R16				180/95R16		
7.50R16	250/80R16	280/70R16	320/65R16		7.50R16	210/95R16	250/80R16	
10R16.5							260/70R16.5	
12R16.5							305/70R16.5	
7.50R18	250/80R18	280/70R18	320/65R18	11LR16	7.50R18	210/95R18		
10.5R18	275 or 280/80R18	325/70R18	340/65R18					
12.5R18	335 or 340/80R18	365/70R18					340/80R18	
12.5/80R18							340/80R18	
16.0/70R18							405/70R18	
7.50R20	250/80R20	280/70R20		400/55R17.5 280/80R18 325/70R18 340/65R18	(8.3R20)	210/90R20		
9.5R20	260/80R20	300/70R20	340/65R20					
10.5R20	275 or 280/80R20	320/70R20		365/70R18	8.3R24	210/90R24		
11.2R20	280/85R20	320/70R20		365/70R18	8.3R24	210/90R24		
12.4R20	320/85R20	360/70R20	420/65R20		9.5R24	250/85R24		
12.5R20	335 or 340/80R20	375/70R20	420/65R20	340/75R20	9.5R24	250/85R24	340/80R20	
14.5R20	365/80R20	400 or 405/70R20		375 or 380/75R20	11.2R24	280/85R24	360/80R20	
14.9LR20				375/75R20	11.2R24	280/85R24		
16.0/70R20		400 or 405/70R20					360/80R20	
8.3R24	210/90R24			365/70R18 320/70R20				
9.5R24	250/85R24	300/70R24		320/85R20 335/80R20 340/75R20 360/70R20 420/65R20				
11.2R24	280/85R24	320/70R24		375/75R20 (14.9LR20) 380/70 or 380/75R20 400 or 405/70R20 425/75R20	8.3R28	210/95R28	300/80R24	
12.4R24	320/85R24	360/70R24	420/65R24	400 or 405/70R24	9.5R28 8.3R32	230/95R28 210/95R32	340/80R24 420/65R24	
13.6R24	340/85R24	380/70R24	440/65R24		11.2R28 8.3R32	280/85R28 210/95R32	360/80R24 460/65R24	
14.9R24	380/85R24	420/70R24	480/65R24	445 or 460/70R24 (17.5LR24)	9.5R32	230/95 or 270/80R32	400/80R24 460/70R24 (17.5LR24) 480/65R24	
16.9R24	420/85R24	480/70R24	540/65R24	495/70R24 500x70R24 (19.5LR24) 440/65R28	11.2R32 8.3R36	270/95R32 210/95R36	440/80R24 500/70R24 (19.5LR24) 540/65R24	380/85R26 (14.9R26) 340/85R28 (13.6R28)

tyre dimension	standard series 85/80	standard series 70	standard series 65	special width on measured rim (1)	VF-/IF-super volume on measured rim (2)	row crop narrow		municipality tyres 80/70/65er series	duals/twin tyres
						inches	metric		
14.9R26	380/85R26			500/70R24 (19.5LR24) 540/65R24 380/70R28		11.2R32 8.3R36	270/95R32 210/95R36	500/70R24 (19.5LR24)	340/85R28 (13.6R28)
16.9R26	420/85R26	480/70R26	540/65R26			9.5R36	230/95R36		340/85R28 (14.9R28)
18.4R26	460/85R26	520/70R26		580/70R26 480/70R28 540/65R28	IF 520/80R26 VF 540/65R28	11.2R36	270/95R36	480/80R26	420/85R28 (16.9R28) 380/85R30 (14.9R30)
23.1-26	620/75R26			600/70R30 710/60R30	VF/IF 600/70R30 VF/IF 710/60R30	9.5R44	230/95R44		340/85R38 (13.6R38) 420/85R34 (16.9R34)
28LR26			750/65R26	600/70R30 710/60R30	VF/IF 600/70R30 VF/IF 710/60R30				420/85R34 (16.9R34)
8.3R28				320/70R24		8.3R28	210/95R28		
9.5R28	250/85R28			360/70R24					
11.2R28	280/85R28	320/70R28		380 or 405/70R24 440/65R24					
12.4R28	320/85R28	360/70R28	420/65R28	460/70R24 (17.5LR24)		9.5R32	230/95 or 270/80R32		340/85R24 (14.9R24)
13.6R28	340/85R28	380/70R28	440/65R28	480 or 480 or 495/70R24 500/70R24 (19.5LR24)	VF 480/60R28	11.2R32 8.3R36	270/95R32 210/95R32		380/85R26 (14.9R26)
14.9R28	380/85R28	420/70R28	480/65R28		VF 480/65R28 VF 520/60R28	12.4R32 9.5R36	320/85R32 230/95 or 270/80R36	400/80R28 480/65R28	
16.9R28	420/85R28	480/70R28	540/65R28	480/80R26 580/70R26	IF 420/85R28 VF 540/65R28 VF 600/60R28	12.4R34 11.2R36	320/90R32 290/95R34 320/85R34 270/95R36	440/80R28 540/65R28	320/85R32 (12.4R32)
14.9R30	380/85R30	420/70R30		580/70R26 420/85R28 480/70R28 540/65R28	IF 420/85R28 VF 540/65R28	12.4R34 11.2R36	320/90R32 290/95R34 320/85R34 270/95R36		230/95R36 (9.5R36)
16.9R30	420/85R30	480/70R30	540/65R30	620/70R26 600/65R28	VF 620/70R26 VF/IF 600/65R28 VF 540/65R30 VF 600/60R30	12.4R36 11.2R38 9.5R40	320/85R36 270/95R38 230/95R40	440/80R30 540/65R30	320/85R34 (12.4R34)
18.4R30	460/85R30	520/70R30	600/65R30	620/75R26 750/65R26 600/70R28 710/55R30	VF/IF 600/70R28 IF 600/65R30	12.4R38 9.5R42 8.3R44	320/85R38 230/95R42 210/95R44		340/85R36 (12.4R36)
23.1R30		620/75R30		1000/50R25	IF 650/75R30				460/85R34 (18.4R34)

(1) Please mind the proper rim sizes.

(2) VF and IF tyres have a very flexible carcass construction in order to carry high loads at low air pressure. They require specialised wider rim sizes.

\* CFO = Cyclic Field Operation

**Please always check the front axle lead of the tractor when mounting new or equivalent tyres.**

Additions, technical changes and deviations reserved.



# CONVERSION TABLE

tyre dimension	standard series 85/80	standard series 70	standard series 65	special width on measured rim (1)	VF-/IF-super volume on measured rim (2)	row crop narrow		municipality tyres 80/70/65er series	duals/twin tyres
						inches	metric		
12.4R32	320/85R32			420/70R28 480/65R28	VF 480/65R28	8.3R36	210/95 or 270/80R36		340/85R28 (14.9R28)
24.5R32		650/75R32							460/85R38 (18.4R38)
30.5LR32			800/65R32	680/75R32	IF 800/65R32 CFO*				460/85R38 (18.4R38)
14.9R34	380/85R34			460/85R30		12.4R38 9.5R42	320/85R38 230/95R42		
16.9R34	420/85R34	480/70R34	540/65R34	620/75R26 600/70R30 750/65R26 710/60R30 750/55R30	VF 540/65R34 VF/IF 600/70R30 VF/IF 710/60R30	13.6R38 11.2R42 9.5R44	340/85R38 270/95 or 300/85R42 230/95R44	440/80R34	
18.4R34	460/85R34	520/70R34	600/65R34	1000/50R25 620/75R30	IF 620/75R30 VF 600/65R34	12.4R42 11.2R44	300/95R42 270/95R44	480/80R34	380/85R38 (14.9R38)
23.1-34		620/75R34		650/75R32					
12.4R36	320/85R36			480/70R30 540/65R30	VF 540/65R30	9.5R40	230/95R40		
13.6R36	340/85R36			620/70R26 600/70R30 520/70R30	VF 620/70R26 VF/IF 600/70R28	12.4R38	320/85R38		
13.6R38	340/85R38			460/85R30 600/65R30 480/70R34 540/65R34	VF 540/65R34	11.2R42 9.5R44	270/95 or 300/85R42 230/95R44		
14.9R38	380/85R38			620/75R26 600/70R30 710/60R34	VF/IF 600/70R30 VF/IF 710/60R30	11.2R42 9.5R44	270/95 or 300/85R42 230/95R44		
15.5R38	400/75R38			540/65R34	VF 540/65R34	9.5R44	230/95R44		320/85R38 (12.4R38)
16.9R38	420/85R38	480/70R38	540/65R38	620/75R30 600/70R34 650/60R34 650/65R34	IF 620/75R30 VF/IF 650/60R34 VF/IF 650/65R34 VF/IF 600/70R34	11.2R46 9.5R48	270/95R46 230/95R48		
18.4R38	460/85R38	520/70R38	600/65R38	650/75R32 (24.5R32) 710/60R34	VF/IF 710/60R34 VF 600/65R38 VF 650/60R38	12.4R46 11.2R48	300/95 or 320/90R46 270/95R38	480/80R38 600/65R38	
20.8R38	520/85R38	580/70R38	650/65R38	800/65R32 1050/50R32 620/75R34 620/70R38	IF 800/65R32 CFO* IF 520/85R38 VF 650/65R38 VF 710/60R38	14.9R46 13.6R48 12.4R50	380/90R46 340/85R48 320/90R50	540/80R38 650/65R38	270/95R48 (11.2R48) 340/85R46 (13.6R46)

tyre dimension	standard series 85/80	standard series 70	standard series 65	special width on measured rim (1)	VF-/IF-super volume on measured rim (2)	row crop narrow		municipality tyres 80/70/65er series	duals/twin tyres
						inches	metric		
18.4R42	460/85 or 480/80R42		600/65R42	800/70R32	IF 800/70R32 CFO*	14.9R46 13.6R48 16.9R46 12.4R50	380/90R46 340/85R48 420/80R46 320/90R50		
20.8R42	520/85R42	580 or 580 or 620/70R42	650/65R42	680/85R32 900/60R32 710/75R34 650/75R38 710/70R38 900/50R42	IF 680/85R32 CFO* IF 650/75R38 VF/IF 710/70R38 IF 520/85R42 VF 650/65R42 VF 710/60R42 VF 900/50R42	18.4R46 14.9R50 12.4R52 11.2R54	480/80R46 380/90R50 300/95R52 270/95R54 320/90R54	650/65R42	380/90R46 (14.9R46)
14.9R46	380/90 or 420/80R46			650/75R32		13.6R48	340/85R48		
18.4R46	460/85 or 480/80R46			680/85R32 520/85R42 620/70R42 900/50R42	IF 680/85R32 CFO* IF 620/70R42 VF 900/50R42	14.9R50	380/90R50		
20.8R46	520/85R46			650/85R38 800/70R38 900/60R38 650/75R42 710/70R42	VF/IF 650/85R38 VF/IF 800/70R38 CFO* VF/IF 900/60R38 VF/IF 580/85R42 VF/IF 710/70R42 VF/IF 480/80R50	18.4R50 14.9R54	380/105R50 480/80R50 380/90R54	650/85R38 710/70R42	320/90R54
18.4R50	480/80R50			650/85R38 800/70R38 900/60R38 710/70R42	VF/IF 650/85R38 VF/IF 800/70R38 CFO* VF/IF 900/60R38 IF 580/85R42 VF/IF 710/70R42 VF/IF 480/80R50	14.9R54	380/90R54	650/85R38 710/70R42	
20.8R50	520/85R50			710/75R42 900/60R42	IF 710/85R38 IF 650/85R42 VF/IF 710/75R42 VF/IF 900/60R42 VF 750/70R44 VF480/95R50  (IF 750/75R46) (IF 900/60R46)		480/95R50		

(1) Please mind the proper rim sizes.

(2) VF and IF tyres have a very flexible carcass construction in order to carry high loads at low air pressure. They require specialised wider rim sizes.

\* CFO = Cyclic Field Operation

**Please always check the front axle lead of the tractor when mounting new or equivalent tyres.**

Additions, technical changes and deviations reserved.





## LEGAL NOTICE



EATD | European Agriculture Tyre Distributors B.V.

Industriestraat 12  
3291 CC Strijen  
The Netherlands

P.O. Box 5722  
3290 AA Strijen  
The Netherlands

## CONTACT

[info@tianli-tyre.com](mailto:info@tianli-tyre.com)  
[www.tianli-tyre.com](http://www.tianli-tyre.com)

All information without guarantee.  
We assume no liability for printing errors.